

EO 13901 (REV 11-98) Modified)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

C41889/123076

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/786790

INTERNATIONAL APPLICATION NO.
PCT/KR00/00364

INTERNATIONAL FILING DATE
19 April 2000

PRIORITY DATE CLAIMED
2 August 1999.

TITLE OF INVENTION

REMOTE SAVING METHOD OF THE SEARCH INFORMATION ON THE INTERNET

APPLICANT(S) FOR DO/EO/US

Tae Gyu LEE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☐ A copy of the International Search Report (PCT/ISA/210).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

1) Check in the amount of \$940; 2) 18 Sheets of Formal Drawings (Figs. 1-12b); 3) Unexecuted Declaration; 4) Copy of First Sheet of International Application as published; 5) Preliminary Amendment; 6) Assertion of Small Entity Status
7) Copy of International Application as filed (59 pages).

21) Assertion of Small Entity Status - UPON INFORMATION AND BELIEF, APPLICANTS ARE ENTITLED TO SMALL ENTITY STATUS AND A CLAIM TO SUCH STATUS IS HEREBY INCLUDED.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/786790)	INTERNATIONAL APPLICATION NO PCT/KR00/00364	ATTORNEY'S DOCKET NUMBER C41889/123076
--	---	--

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☒ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$970.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$840.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$690.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$670.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **\$96.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY****\$1,000.00**Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).**\$130.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	35 - 20 =	15	x \$18.00	\$270.00	
Independent claims	9 - 3 =	6	x \$80.00	\$480.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	

TOTAL OF ABOVE CALCULATIONS = \$1,880.00Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☒**\$940.00****SUBTOTAL = \$940.00**Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). ☐ +**\$0.00****TOTAL NATIONAL FEE = \$940.00**Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐**\$0.00****TOTAL FEES ENCLOSED = \$940.00**

Amount to be refunded	\$
charged	\$

☒ A check in the amount of **\$940.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **02-4467** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Bosco B. Kim, Esq.
BRYAN CAVE LLP
 245 Park Avenue
 New York, NY 10167
 Telephone No. 212-692-1800
 Facsimile No.: 212-692-1900

SIGNATURE

Bosco B. Kim

NAME

41,896

REGISTRATION NUMBER

March 9, 2001

DATE

09/786790

JC02 Rec'd PCT/PTO 09 MAR 2001

Docket No.: C41889/123076

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Application of:)
Tae Gyu LEE)
)
International Application No.) Examiner: To Be Assigned
PCT/KR00/00364)
)
International Filing Date:) Art Unit: To Be Assigned
19 April 2000)
)
)

For: **REMOTE SAVING METHOD OF THE SEARCH INFORMATION ON THE
INTERNET**

March 9, 2001

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Please amend the above identified application as follows:

IN THE CLAIMS

Claim 7, lines 1-2, please delete "in any one of Claim 1 to Claim 6" and insert
therefore --in Claim 1--.

Claim 8, lines 1-2, please delete "in any one of Claim 1 to Claim 6" and insert
therefore --in Claim 1--.

Claim 18, lines 1-2, please delete "in any one of Claim 12 to Claim 17" and insert therefore --in Claim 12--.

Claim 19, lines 1-2, please delete "in any one of Claim 12 to Claim 17" and insert therefore --in Claim 12--.

Claim 31, lines 1-2, please delete "in any one of Claim 25 to Claim 30" and insert therefore --in Claim 25--.

Claim 32, lines 1-2, please delete "in any one of Claim 25 to Claim 30" and insert therefore --in Claim 25--.

REMARKS

This amendment is being submitted to eliminate the multiple dependencies of claims 7, 8, 18, 19, 31 and 32. No new matter has been added, and the entry of the foregoing amendment is respectfully requested.

Respectfully submitted,

By: 

Bosco B. Kim
Reg. No. 41,896
BRYAN CAVE LLP
245 Park Avenue
New York, New York 10167-0034
(212) 692-1800

18/ PRTS

REMOTE SAVING METHOD OF THE SEARCH INFORMATION ON THE INTERNET

Technical Field of the Invention

5

The present invention relates to a method for remote storing of information searched on the Internet, wherein shared information on the Internet is stored remotely in one or more remote computers or loaded remotely from remote computers.

Background of the Invention

10

Owing to the recent activation of information sharing over the Internet, information users scattered over the whole world have constructed primitive information texts of fixed formats, in particular Web texts, in their computers.

15

In order to acquire desired information on the Internet, information users can freely share primitive information texts distributed over various regions of the world, using a variety of communication application programs, in particular, communication programs such as a file transfer service (e.g., file transfer protocol: FTP), a remote computer connection service (e.g., Telnet), a Web browser, etc.

20

In order to search for a desired Web text, an information searcher searches generally the Internet using a Web browser and a search engine. After the search, the information searcher may wish to store the searched results or to have them printed out through a printer.

25

In the case where the information searcher searches for desired information on the Internet at a location distant from his ordinary working site, he may want to store the searched information in his computer located in his ordinary working site, if

09/7 86790 042701

necessary.

In particular, when the information searcher gains access to the Internet using a terminal unit having a small memory capacity such as a mobile telecommunication terminal or a personal information terminal, for example, a personal digital assistant
5 (PDA), and searches for a desired text, he is likely to wish to store the searched information in another storage system having a larger memory capacity, located in a remote site, because said terminal unit is not capable of storing the searched information due to its small memory capacity.

Accordingly, there is a recent need for development of a method for storing a
10 text searched on the Internet by using a mobile telecommunication terminal or personal information terminal or a computer, in a remote storage system located distant from said search means.

On the other hand, an information user generally uploads an information text to be shared by him to the Internet using a Web browser, a file transfer service such as an
15 FTP, etc.

The information user may conduct his ordinary works at several computers distributed on the Internet or under working environments where the distributed computers are frequently interrupted by disconnection. In these cases, the information user needs to store the shared information on the Internet safely at several different
20 places and to selectively upload the stored information to the Internet.

Especially, in the case where the information user wishes to upload a shared text on the Internet to a server using a terminal unit having a small memory capacity such as a mobile telecommunication terminal or a personal information terminal, for example, a PDA, he needs to selectively and remotely load the shared text from other
25 remote loading systems located in remote sites to the server because said terminal unit is not able to store or process the shared text due to its small memory capacity.

Accordingly, there is a recent need for development of a method for remotely loading a shared text automatically and selectively from a mobile telecommunication terminal or personal information terminal or various other systems including a computer used by an information user, to the Internet.

5

Summary of the Invention

Thus, the present invention, conceived to solve the above problems, aims to provide a method with which an information searcher can access a Web server on the Internet, search for desired information and store the searched information in a storage system in a remote site for a predetermined period of time.

Another objective of the present invention is to provide a method wherein an information searcher can access a Web server on the Internet, search for desired information and store the searched information automatically in a storage system in a remote site for a predetermined period of time.

A further objective of the present invention is to provide a method wherein an information user can access a service server on the Internet and remotely load shared information from a plurality of remote loading systems selectively to the service server for a predetermined period of time.

A further objective of the present invention is to provide a method wherein an information user can access a service server on the Internet and automatically upload shared information from a plurality of remote loading systems selectively to the service server for a predetermined period of time.

Another objective of the present invention is to provide a multiple storage method wherein an information searcher can access a Web server or other service server on the Internet, search for desired information, and store the searched

information in a duplicate manner in a plurality of storage systems for a predetermined period of time.

It is yet another objective of the present invention to provide a multiple storage method wherein an information searcher can access a service server on the Internet, search for desired information, and automatically store the searched information in a duplicate manner in a plurality of storage systems for a predetermined period of time.

In accordance with one aspect of the present invention, the above and other objectives can be accomplished by provision of a remote storage method which comprises the first step of allowing an information searcher to access a Web server and search it for desired information; the second step of allowing the information searcher to request the Web server for a remote storage service; the third step of allowing the information searcher to send to the Web server the uniform resource locator of the searched information and that of a remote-site server in which the searched information is to be stored; the fourth step of allowing the Web server to set up a storage path with the remote-site server under the condition that it is online to the remote-site server and send a remote storage request message to the remote-site server; the fifth step of allowing the Web server to send to the remote-site server a Web text to be stored and a uniform resource locator indicative of a storage location of the Web text in the remote-site server; and the sixth step of allowing the remote-site server to store the Web text if the storage path set-up by the Web server is valid.

In accordance with another aspect of the present invention, there is provided a remote storage method which comprises the first step of allowing an information searcher to access a Web server and search it for desired information; the second step of allowing the information searcher to receive the searched information from the Web server and store it; the third step of allowing the information searcher to set up a transfer path with a remote-site server in which the searched information is to

be stored; and the fourth step of allowing the information searcher to store the searched information in the remote-site server along with the set-up transfer path.

In accordance with a further aspect of the present invention, there is provided a remote storage method which comprises the first step of allowing an information
5 searcher to access a Web server and search it for desired information; the second step of allowing the information searcher to receive the searched information from the Web server and store it; and the third step of allowing the information searcher to send the searched information by electronic mail to a remote-site server in which the searched information is to be stored.

10 In accordance with a further aspect of the present invention, there is provided a remote loading method which comprises the first step of allowing an information user to access a service server and search it for a location for uploading the shared information; the second step of allowing the information user to request the service server for a remote loading service; the third step of allowing the information user to
15 send to the service server the uniform resource locator indicative of the location for uploading the shared information in the service server and the uniform resource locators of a plurality of remote loading servers which have the shared information; the fourth step of allowing the service server to set up an uploading path with any one of the remote loading servers selected by the information user under the condition that
20 it is online to the selected remote loading server and to send a remote loading request message (to the selected remote loading server); the fifth step of allowing the selected remote loading server to send to the service server a shared information text to be remotely uploaded and the uniform resource locator indicative of the uploading location of the shared information text in the service server; and the sixth step of
25 allowing the service server to store the shared information text if the uploading path is valid.

resource locator of the searched information and uniform resource locators of a plurality of remote-site clients in which the searched information is to be stored; the fourth step of allowing the Web server to set up storage paths with the respective remote-site client under the condition that it is online to the respective remote-site client and to send a remote storage request message to each of said remote-site clients; the fifth step of allowing the Web server to send to each of said remote-site clients a Web text to be stored and a uniform resource locator indicative of a storage location of the Web text in each of the remote-site clients; and the sixth step of allowing each of the remote-site clients to store the Web text if the corresponding storage path set-up by the Web server is valid.

In accordance with another aspect of the present invention, there is provided a remote storage method which comprises the first step of allowing an information searcher to access a Web server and search it for desired information; the second step of allowing the information searcher to receive the searched information from the Web server and store it; the third step of allowing the information searcher to set up transfer paths with a plurality of remote-site clients in which the searched information is to be stored, respectively; and the fourth step of allowing the information searcher to store the searched information in the remote-site clients along with the set-up transfer paths

In accordance with yet another aspect of the present invention, there is provided a remote storage method which comprises the first step of allowing an information searcher to access a Web server and search it for desired information; the second step of allowing the information searcher to receive the searched information from the Web server and store it; and the third step of allowing the information searcher to send the searched information using electronic mail to a plurality of remote-site clients in which the searched information is to be stored.

In order to realize the present invention on a Web browser or search site, a new or expanded transfer protocol, a client program (the Web browser or search site), a server program, and the like is required.

A new or expanded Web server and Web database are required to be
5 constructed to provide either a remote storage function or remote loading function to users on the basis of the above realization.

It is assumed herein that a user assigns priorities to remote-site server computers for the remote storage or remote-site server computers for the remote loading in advance.

10

Brief Description of the Drawings

The present invention will be more clearly understood from the following description taken in conjunction with the accompanying drawings, in which:

15 Fig. 1 is a drawing showing an Internet network to which the method for remote storing of information searched on the Internet in accordance with the preferred embodiment of the present invention applies;

Figs. 2a and 2b are flowcharts illustrating the remote storage method in accordance with the preferred embodiment of the present invention;

20 Fig. 3 is a drawing showing a wireless Internet network to which the method for remote storing of information searched on the Internet in accordance with another embodiment of the present invention applies;

Figs. 4a and 4b are flowcharts illustrating the remote storage method in accordance with another embodiment of the present invention;

25 Fig. 5 is a drawing showing an Internet network to which the method for remote loading of information on the Internet in accordance with another embodiment

of the present invention applies;

Figs. 6a and 6b are flowcharts illustrating the remote loading method in accordance with another embodiment of the present invention;

Fig. 7 is a drawing showing a wireless Internet network to which the method
5 for remote loading of information to the Internet in accordance with another embodiment of the present invention applies;

Figs. 8a and 8b are flowcharts illustrating the remote loading method in accordance with another embodiment of the present invention;

Fig. 9 is a drawing showing an Internet network to which the method for
10 duplicate storing of information searched and accessed on the Internet in accordance with another embodiment of the present invention applies;

Figs. 10a and 10b are flowcharts illustrating the duplicate storage method in accordance with another embodiment of the present invention;

Fig. 11 is a drawing showing a wireless Internet network to which the method
15 for duplicate storing of information searched and accessed on the Internet in accordance with another embodiment of the present invention applies; and

Figs. 12a and 12b are flowcharts illustrating the duplicate storage method in accordance with another embodiment of the present invention.

20 **Detailed Description of the Preferred Embodiments**

Fig. 1 is a drawing showing an Internet network to which the method for remote storing of information searched on the Internet in accordance with the preferred embodiment of the present invention applies and Figs 2a and 2b are
25 flowcharts illustrating the remote storage method in accordance with the preferred embodiment of the present invention.

First, an information searcher accesses a desired one of Web servers 110a-110n on the Internet 130 using a client 99 at step S10 and searches the accessed Web server (hereinafter, "110") for desired information using a Web browser or search engine at step S11.

5 The Web browser or search engine used here may preferably be a new or expanded client program that provides the information searcher with a remote storage menu or icon and, when a remote storage service is in progress, with an intelligent icon indicative of the progress state.

10 If the information searcher has found the desired information, then he selects the information to be stored from the searched information at step S12 and clicks on the remote storage menu or icon to request the remote storage service of the accessed Web server 110 at step S13.

15 A new or expanded transfer protocol may preferably be used for the transfer of information between the client 99 and the Web server 110 and have an expanded field for enabling the client 99 to request the Web server 110 to execute a remote storage function.

20 The expanded field may include a flag bit (hereinafter, 'RS') indicative of the execution of the remote storage function. For example, when the client 99 sets the flag bit to 1, or $RS = 1$, the Web server 110 runs a remote storage server program capable of additionally performing the remote storage function.

25 When the client 99 requests a remote storage service of the accessed Web server 110, it sends to the Web server 110 a uniform resource locator (URL) indicative of the location of a Web text in the Web server 110 to be stored and a URL of a desired one of remote-site servers 100a-100n in which the Web text is to be stored, together with other additional information at step S14.

 Upon receiving the remote storage service request from the client 99, the

accessed Web server 110 checks the flag bit in the expanded field and runs the remote storage server program at step S15 if the flag bit has been set to 1. As a result, the Web server 110 checks the status of the remote-site server (hereinafter, “100”) desired by the client 99 at step S16 to determine whether it is online to the remote-site server
 5 100. If the Web server 110 is online to the remote-site server 100, then it sets up a storage path with the server 100 at step S17.

A new or expanded transfer protocol may preferably be used for the transfer of information between the Web server 110 and the remote-site server 100 and have an expanded field for enabling the Web server 110 to request the remote-site server 100
 10 to execute a remote storage function.

The expanded field may include a flag bit (hereinafter, ‘RSF’) indicative of the execution of the remote storage function. For example, when the Web server 110 sets the flag bit to 1, or RSF = 1, the remote-site server 100 runs a remote storage server program capable of additionally performing the remote storage function.

15 After setting up the storage path with the remote-site server 100, the Web server 110 sets the flag bit in the expanded field to 1, or RSF = 1, and sends to the remote-site server 100 a remote storage request message containing a URL indicative of a storage location of the Web text in the server 100, an Internet protocol (IP) address of the server 110, the contents of the Web text to be stored and other
 20 additional information, at steps S18 and S19, respectively.

Upon receiving the remote storage request message from the Web server 110, the remote-site server 100 checks the flag bit in the expanded field of the received request message and runs the remote storage server program at step S20 if the flag bit has been set to 1, or RSF = 1. As a result, the remote-site server 100 checks the status
 25 of the storage path designated by the Web server 110 at step S21 to determine whether it is valid. In the case where the designated storage path is valid, the remote-site

server 100 stores the contents of the Web text received from the Web server 110 in a specific location of its storage unit at step S22.

Thereafter, in order to notify the working state the remote-site server 100 sends to the Web server 110 a remote storage response message including an expanded flag
5 bit set to 1, or $RSR = 1$, at step S23.

Upon receiving the remote storage response message including the expanded flag bit set to 1, or $RSR = 1$, from the remote-site server 100, the Web server 110 checks the flag bit and then sends a remote storage response delivery message containing information received from the remote-site server 100 to the client 99 that
10 has requested the remote storage service, at step S24.

At this time, the remote storage response delivery message sent to the client 99 includes an expanded flag bit set to 1, or $RSRF = 1$.

Upon receiving the remote storage response delivery message from the Web server 110, including the expanded flag bit set to 1, or $RSRF = 1$, the service
15 requesting client 99 determines whether the associated remote storage work has been completed. If the associated remote storage work has been completed, the client 99 informs the information searcher by changing the indication of the intelligent icon from the remote storage progress state to the remote storage completion state at step S25.

20 On the other hand, in the case where it is determined that the Web server 110 is not online to the remote-site server 100, the Web server 110 sends an error message to the client 99 (at steps S26 and S27).

Then, the client 99 controls the intelligent icon at step S28 to indicate an error state and the Web server 110 sends a confirmation message to the client 99 at step S29
25 to confirm at step S30 whether the information searcher wants to deliver the Web text to the remote-site server 100 by electronic mail (E-mail). Unless the information

searcher wants to deliver the Web text by E-mail, then the Web server 110 ends the entire operation. However, if the information searcher wants to deliver the Web text by E-mail, then the Web server 110 requests a mail server 120 for an E-mail service at step S31.

5 Subsequently, the mail server 120 delivers the Web text to the remote-site server 100 by E-mail at step S32 and the entire operation ends.

On the other hand, in the case where it is determined that the storage path designated by the Web server 110 is not valid, the remote-site server 100 sends an error message to the Web server 110 at step S26.

10 Upon receiving the error message from the remote-site server 100, the Web server 110 sends it further to the client 99 at step S27.

In response to the error message from the Web server 110, the client 99 controls the intelligent icon at step S28 to indicate an error state, and the Web server 110 sends a confirmation message to the client 99 at step S29 to confirm at step S30 whether the information searcher wants to deliver the Web text to the remote-site server 100 by E-mail. Unless the information searcher wants to deliver the Web text by E-mail, the Web server 110 ends the entire operation. In the case where the information searcher wants to deliver the Web text by E-mail, the Web server 110 requests the mail server 120 for an E-mail service at step S31.

20 Thereafter, the mail server 120 delivers the Web text to the remote-site server 100 by E-mail at step S32 and the entire operation ends.

On the other hand, the Web server 110 may show storage situation of the searched information in a local or remote backup space using a graph or icon. The Web server 110 may also show a storage tree indicative of a storage structure and connection state of a target computer in which the searched information is to be stored.

Although the preferred embodiment of the present invention describes only the case of storing searched information, the present invention may also be implemented to print the searched information as well as to store it, or to print it alone.

Fig. 3 is a diagram showing a wireless Internet network to which the method
5 for remote storing of information searched on the Internet in accordance with another embodiment of the present invention applies and Figs. 4a and 4b are flowcharts illustrating the remote storage method in accordance with another embodiment of the present invention.

Said wireless Internet network comprises a mobile telecommunication terminal
10 200, equipped with an external command input unit for inputting external command, said terminal 200 converts the inputted command into a radio frequency (RF) signal suitable to a data service and transmits the converted RF signal; a base transceiver station 210 which receives the RF signal transmitted from the mobile telecommunication terminal 200 and demodulates it into the original command; a
15 wireless network 220 which functions to output the command demodulated by the base transceiver station 210 together with an identification (ID) number of the mobile telecommunication terminal 200 according to a protocol for an Internet service; a gateway 230 which receives an output signal from the wireless network 220 and converts the received signal into a transmission control protocol/Internet protocol
20 (TCP/IP) signal or hypertext transfer protocol (HTTP) signal suitable to Internet connection; the Internet 240 connects the gateway 230 to other networks for execution of operation associated with the command from the gateway 230, a Web server 250 which provides Web information in response to the command from the Internet 240; a mail server 260; and a remote-site server.

25 First, an information searcher accesses the Web server 250 on the Internet 240 using the mobile telecommunication terminal 200 at step S110 and searches the

accessed Web server 250 for desired information using a Web browser or search engine at step S111.

The used Web browser or search engine may preferably be a new or expanded client program that provides the information searcher with a remote storage menu or icon and, when a remote storage service is in progress, with an intelligent icon indicative of the progress state.

If the information searcher has found the desired information, then he selects the information to be stored from the searched information at step S112 and clicks on the remote storage menu or icon to request the remote storage service of the Web server 250 at step S113.

A new or expanded transfer protocol may preferably be used for the transfer of information between the mobile telecommunication terminal 200 and the Web server 250, and have an expanded field for enabling the terminal 200 to request the Web server 250 to execute a remote storage function.

The expanded field may include a flag bit (hereinafter, 'RS') indicative of the execution of the remote storage function. For example, when the mobile telecommunication terminal 200 sets the flag bit to 1, or $RS = 1$, the Web server 250 runs a remote storage server program capable of additionally performing the remote storage function.

When the mobile telecommunication terminal 200 requests the Web server 250 for a remote storage service, it sends to the Web server 250 a URL indicative of the location of a Web text in the Web server 250 to be stored and a URL of the remote-site server 270 in which the Web text is to be stored, together with other additional information at step S114.

In response to the remote storage service request from the mobile telecommunication terminal 200, the Web server 250 checks the flag bit in the

expanded field and runs the remote storage server program at step S115 if the flag bit has been set to 1. As a result, the Web server 250 checks the status of the remote-site server 270 desired by the mobile telecommunication terminal 200 at step S116 to determine whether it is online to the remote-site server 270. If the Web server 250 is online to the remote-site server 270, then it sets up a storage path with the server 270 at step S117.

A new or expanded transfer protocol may preferably be used for the transfer of information between the Web server 250 and the remote-site server 270 and have an expanded field for enabling the Web server 250 to request the remote-site server 270 to execute a remote storage function.

The expanded field may include a flag bit (hereinafter, 'RSF') indicative of the execution of the remote storage function. For example, when the Web server 250 sets the flag bit to 1, or RSF = 1, the remote-site server 270 runs a remote storage server program capable of additionally performing the remote storage function.

After setting up the storage path with the remote-site server 270, the Web server 250 sets the flag bit in the expanded field to 1, or RSF = 1, and sends to the remote-site server 270 a remote storage request message containing a URL indicative of a storage location of the Web text in the server 270, an IP address of the server 250, the contents of the Web text to be stored and other additional information, at steps S118 and S119, respectively.

Upon receiving the remote storage request message from the Web server 250, the remote-site server 270 checks the flag bit in the expanded field of the received request message and runs the remote storage server program at step S120 if the flag bit has been set to 1, or RSF = 1. As a result, the remote-site server 270 checks the status of the storage path designated by the Web server 250 at step S121 to determine whether it is valid. In the case where the designated storage path is valid, the remote-

site server 270 stores the contents of the Web text received from the Web server 250 in a specific location of its storage unit at step S122

Thereafter, in order to notify the working state, the remote-site server 270 sends to the Web server 250 a remote storage response message including an expanded flag bit set to 1, or $RSR = 1$, at step S123.

Upon receiving the remote storage response message including the expanded flag bit set to 1, or $RSR = 1$, from the remote-site server 270, the Web server 250 checks the flag bit and then sends a remote storage response delivery message containing information received from the remote-site server 270 to the mobile telecommunication terminal 200 that has requested the remote storage service, at step S124.

At this time, the remote storage response delivery message sent to the mobile telecommunication terminal 200 includes an expanded flag bit set to 1, or $RSRF = 1$.

Upon receiving the remote storage response delivery message from the Web server 250, including the expanded flag bit set to 1, or $RSRF = 1$, the service requesting terminal 200 determines whether the associated remote storage work has been completed. If the associated remote storage work has been completed, the mobile telecommunication terminal 200 informs the information searcher by changing the indication of the intelligent icon from remote storage progress state to remote storage completion state at step S125.

On the other hand, in the case where it is determined that the Web server 250 is not online to the remote-site server 270, the Web server 250 sends an error message to the mobile telecommunication terminal 200 (at steps S126 and S127)

Then, the mobile telecommunication terminal 200 controls the intelligent icon at step S128 to indicate an error state and the Web server 250 sends a confirmation message to the mobile telecommunication terminal 200 at step S129 to confirm at step

S130 whether the information searcher wants to deliver the Web text to the remote-site server 270 by E-mail. Unless the information searcher wants to deliver the Web text by E-mail, the Web server 250 ends the entire operation. However, if the information searcher wants to deliver the Web text by E-mail, then the Web server
5 250 requests the mail server 260 for an E-mail service at step S131.

Thereafter, the mail server 260 delivers the Web text to the remote-site server 270 by E-mail at step S132 and the entire operation ends.

On the other hand, in the case where it is determined that the storage path designated by the Web server 250 is not valid, the remote-site server 270 sends an
10 error message to the Web server 250 at step S126.

Upon receiving the error message from the remote-site server 270, the Web server 250 sends it further to the mobile telecommunication terminal 200 at step S127.

In response to the error message from the Web server 250, the mobile telecommunication terminal 200 controls the intelligent icon at step S128 to indicate
15 an error state, and the Web server 250 sends a confirmation message to the terminal 200 at step S129 to confirm at step S130 whether the information searcher wants to deliver the Web text to the remote-site server 270 by E-mail. Unless the information searcher wants to deliver the Web text by E-mail, the Web server 250 ends the entire operation. In the case where the information searcher wants to deliver the Web text
20 by E-mail, the Web server 250 requests the mail server 260 for an E-mail service at step S131.

Subsequently, the mail server 260 delivers the Web text to the remote-site server 270 by E-mail at step S132 and the entire operation ends.

On the other hand, the Web server 250 may show the storage situation of the
25 searched information in a local or remote backup space using a graph or icon. The Web server 250 may also show a storage tree indicative of a storage structure and

connection state of a target computer in which the searched information is to be stored.

Although said another embodiment of the present invention describes only the case of storing searched information, the present invention may also be implemented
5 to print the searched information as well as to store it, or to print it alone.

Further, although the above embodiment of the present invention describes the remote storage method using a mobile telecommunication terminal, it may be implemented in the same manner using PDA products having an insufficient memory capacity as well.

10 Also, in the above embodiments of the present invention, a desired Web text from a Web server is stored in neither a client nor a mobile telecommunication terminal, but directly in a remote-site server. At this time, because only abstracted contents of the Web text are displayed on the mobile telecommunication terminal, an information searcher may have difficulty in recognizing those contents and obtaining
15 sufficient information therefrom. In this regard, not abstracted but rather the full contents of the Web text, may be stored in the remote-site server distinct from those displayed on the mobile telecommunication terminal. As an alternative, either the client or mobile telecommunication terminal may comprise a caching memory (RAM or disc) in which the desired Web text from the Web server is first stored and then in
20 the remote-site server

In other words, the information searcher accesses the Web server and searches it for desired information. The information searcher receives the searched information from the Web server and stores it in the client or mobile telecommunication terminal. Then, the information searcher sets up a transfer path between the client or mobile
25 telecommunication terminal and the remote-site server, and stores the searched information in the remote-site server through the set-up transfer path.

Alternatively, the information searcher may access the Web server, search it for desired information, receive the searched information from the Web server, store it in the client or mobile telecommunication terminal, and send the searched information to the remote-site server by E-mail.

5 In an embodiment of the present invention, the following search engine is proposed to be constructed for search and storage of information using a mobile telecommunication terminal:

A general mobile telecommunication terminal may have difficulty in displaying a large amount of data because it is limited in buffer space for display. In
10 order to overcome this difficulty, in a proposed service for the mobile telecommunication terminal, a new constituting element, or "Web abstract", is added to the original Web text and provided to a Web database and a Web search engine, in contrast to a conventional general service.

Accordingly, in case an information searcher accesses a desired Web text on
15 the Internet using a mobile telecommunication terminal, an associated Web server provides primarily only a Web keyword or Web abstract element to the terminal

Thereafter, in case the information searcher requests storage of the Web text, the Web server stores all the contents of or the constituting elements of the Web text such as the Web keyword, the Web abstract, the contents of the Web text, etc. in a
20 remote-site server

Fig. 5 is a drawing showing an Internet network to which the method for remote loading of information to the Internet in accordance with another embodiment of the present invention applies and Figs. 6a and 6b are flowcharts illustrating the remote loading method in accordance with said another embodiment of the present
25 invention.

First, an information user accesses a desired one of service servers 310a-310n

on the Internet 330 such as Web servers using a client 299 at step S60 and searches the accessed service server (hereinafter, "310") for an uploading location for shared information using a Web browser or search engine at step S61.

The used Web browser or search engine may preferably be a new or expanded
5 client program that provides the information user with a remote loading menu or icon and, when a remote loading service is in progress, with an intelligent icon indicative of the progress state.

If the information user has found the uploading location for the shared information, then he selects that location at step S62 and clicks on the remote loading
10 menu or icon to request the accessed service server 310 for a remote loading service at step S63.

A new or expanded transfer protocol may preferably be used for the transfer of information between the client 299 and the service server 310, and have an expanded field for enabling the client 299 to request the service server 310 to execute a remote
15 loading function.

The expanded field may include a flag bit (hereinafter, 'RL') indicative of the execution of the remote loading function. For example, when the client 299 sets the flag bit to 1, or $RL = 1$, the service server 310 runs a remote loading server program capable of additionally performing the remote loading function.

20 When the client 299 requests a remote loading service of the accessed service server 310, it sends to the service server 310 URLs of a plurality of remote-site servers for remote loading 300a-300n and a URL indicative of an uploading location for a shared information text in the service server 310 together with other additional information at step S64.

25 Upon receiving the remote loading service request from the client 299, the accessed service server 310 checks the flag bit in the expanded field and runs the

remote loading server program at step S65 if the flag bit has been set to 1. As a result, the service server 310 checks the status of any one of the remote loading servers 300a-300n selected by the client 299 at step S66 to determine whether it is online to the selected remote loading server (hereinafter, "300"). If the service server 310 is online
5 to the remote loading server 300, then it sets up an uploading path with the server 300 at step S67.

Preferably, a new or expanded transfer protocol may be used for transfer of information between the service server 310 and the remote loading server 300 and have an expanded field for enabling the service server 310 to request the remote
10 loading server 300 to execute a remote loading function.

The expanded field may include a flag bit (hereinafter, 'RLF') indicative of the execution of the remote loading function. For example, when the service server 310 sets the flag bit to 1, or $RLF = 1$, the remote loading server 300 runs a remote loading server program capable of additionally performing the remote loading function.

15 After setting up the uploading path with the remote loading server 300, the service server 310 sets the flag bit in the expanded field to 1, or $RLF = 1$, and sends to the remote loading server 300 a remote loading request message containing a URL indicative of a storage location for the shared information text in the server 300, an IP address of the server 310 and other additional information, at steps S68 and S69.

20 Upon receiving the remote loading request message from the service server 310, the remote loading server 300 checks the flag bit in the expanded field of the received request message and runs the remote loading server program at step S70 if the flag bit has been set to 1, or $RLF = 1$. As a result, the remote loading server 300 checks the status of the uploading path designated by the service server 310 at step
25 S71 to determine whether it is valid. In case the designated uploading path is valid, the remote loading server 300 uploads the contents of the shared information text from

a specific location of its storage unit to the URL indicative of the uploading location in the service server 310 at step S72.

Thereafter, in order to notify the working state, the remote loading server 300 sends to the service server 310 a remote loading response message including an expanded flag bit set to 1, or RLR = 1, at step S73.

Upon receiving the remote loading response message including the expanded flag bit set to 1, or RLR = 1, from the remote loading server 300, the service server 310 checks the flag bit and then sends a remote loading response delivery message containing information received from the remote loading server 300 to the client 299 that has requested the remote loading service, at step S74.

At this time, the remote loading response delivery message sent to the client 299 includes an expanded flag bit set to 1, or RLRF = 1.

Upon receiving the remote loading response delivery message including the expanded flag bit set to 1, or RLRF = 1, from the service server 310, the service requesting client 299 determines whether the associated remote loading work has been completed. If the associated remote loading work has been completed, the client 299 informs the information user by changing the indication of the intelligent icon from remote loading progress state to remote loading completion state at step S75.

On the other hand, in the case where it is determined that the service server 310 is not online to the remote loading server 300, the service server 310 sends an error message to the client 299.

Then, the client 299 controls the intelligent icon at step S78 to indicate an error state and the service server 310 sends a confirmation message to the client 299 at step S79 to confirm at step S80 whether the information user wants to deliver the remote loading request message to the remote loading server 300 by E-mail. Unless the information user wants to deliver the remote loading request message by E-mail, the

service server 310 ends the entire operation. However, if the information user wants to deliver the remote loading request message by E-mail, then the service server 310 requests a mail server 320 for an E-mail service at step S81.

Subsequently, the mail server 320 delivers the remote loading request message
5 to the remote loading server 300 by E-mail at step S82 and the entire operation ends.

On the other hand, in the case where it is determined that the uploading path designated by the service server 310 is not valid, the remote loading server 300 sends an error message to the service server 310 at step S76.

Upon receiving the error message from the remote loading server 300, the
 10 service server 310 sends it further to the client 299 at step S77.

In response to the error message from the service server 310, the client 299 controls the intelligent icon at step S78 to indicate an error state, and the service server 310 sends a confirmation message to the client 299 at step S79 to confirm at step S80 whether the information user wants to deliver the remote loading request message to the remote loading server 300 by E-mail. Unless the information user wants to deliver the remote loading request message by E-mail, the service server 310 ends the entire operation. In the case where the information user wants to deliver the remote loading request message by E-mail, the service server 310 requests the mail server 320 for an E-mail service at step S81.

20 Thereafter, the mail server 320 delivers the remote loading request message to
the remote loading server 300 by E-mail at step S82 and the entire operation ends.

On the other hand, the service server 310 may show an uploading situation for a shared information text from a local or remote backup space using a graph or icon. The service server 310 may also show a storage tree indicative of storage structures and connection states of target computers for the remote loading of the shared information text.

Although the above embodiment of the present invention describes only the case of remote loading operation, the present invention may also selectively perform a multiple loading operation.

Fig. 7 is a diagram showing a wireless Internet network to which the method
5 for remote loading of information on the Internet in accordance with another embodiment of the present invention applies and Figs. 8a and 8b are flowcharts illustrating the remote loading method in accordance with said another embodiment of the present invention.

Said wireless Internet network comprises: a mobile telecommunication
10 terminal 400, equipped with an external command input unit for inputting external command, said terminal 400 converts the inputted command into a RF signal suitable to a data service and transmits the converted RF signal; a base transceiver station 410 which receives the RF signal transmitted from the mobile telecommunication terminal 400 and demodulates it into the original command; a wireless network 420 which
15 functions to output the command demodulated by the base transceiver station 410 together with an ID number of the mobile telecommunication terminal 400 according to a protocol for an Internet service; a gateway 430 which receives an output signal from the wireless network 420 and converts the received signal into a TCP/IP signal or HTTP signal suitable to Internet connection; the Internet 440 which connects the
20 gateway 430 to other networks for execution of operation associated with the command from the gateway 430; a service server 450, which may preferably be a Web server and provide information in response to the command from the Internet 440; a mail server 460, and a plurality of remote loading servers 470a-470n.

First, an information user accesses the service server 450 on the Internet 440
25 using the mobile telecommunication terminal 400 at step S210 and searches the accessed service server 450 for an uploading location for shared information using a

Web browser or search engine at step S211

The used Web browser or search engine may preferably be a new or expanded client program that provides the information user with a remote loading menu or icon and, when a remote loading service is in progress, with an intelligent icon indicative
5 of the progress state.

If the information user has found the uploading location for the shared information, then he selects that location at step S212 and clicks on the remote loading menu or icon to request the service server 450 for a remote loading service at step S213.

10 A new or expanded transfer protocol may preferably be used for the transfer of information between the mobile telecommunication terminal 400 and the service server 450, and have an expanded field for enabling the terminal 400 to request the service server 450 to execute a remote loading function.

The expanded field may include a flag bit (hereinafter, 'RL') indicative of the
15 execution of the remote loading function. For example, when the mobile telecommunication terminal 400 sets the flag bit to 1, or $RL = 1$, the service server 450 runs a remote loading server program capable of additionally performing the remote loading function.

When the mobile telecommunication terminal 400 requests a remote loading
20 service of the service server 450, it sends to the service server 450 URLs of the remote loading servers 470a-470n and a URL indicative of an uploading location for shared information text in the service server 450 together with other additional information at step S214.

In response to the remote loading service request from the mobile
25 telecommunication terminal 400, the service server 450 checks the flag bit in the expanded field and runs the remote loading server program at step S215 if the flag bit

has been set to 1. As a result, the service server 450 checks the status of any one of the remote loading servers 470a-470n selected by the mobile telecommunication terminal 400 at step S216 to determine whether it is online to the selected remote loading server (hereinafter, "470"). If the service server 450 is online to the remote loading server 470, then it sets up an uploading path with the server 470 at step S217.

A new or expanded transfer protocol may preferably be used for the transfer of information between the service server 450 and the remote loading server 470 and have an expanded field for enabling the service server 450 to request the remote loading server 470 to execute a remote loading function.

10 The expanded field may include a flag bit (hereinafter, 'RLF') indicative of the execution of the remote loading function. For example, when the service server 450 sets the flag bit to 1, or RLF = 1, the remote loading server 470 runs a remote loading server program capable of additionally performing the remote loading function

After setting up the uploading path with the remote loading server 470, the service server 450 sets the flag bit in the expanded field to 1, or RLF = 1, and sends to the remote loading server 470 a remote loading request message containing a URL indicative of a storage location of the shared information text in the server 470, an IP address of the server 450 and other additional information, at steps S218 and S219, respectively.

20 Upon receiving the remote loading request message from the service server 450, the remote loading server 470 checks the flag bit in the expanded field of the received request message and runs the remote loading server program at step S220 if the flag bit has been set to 1, or RLF = 1. As a result, the remote loading server 470 checks the status of the uploading path designated by the service server 450 at step S221 to determine whether it is valid. In the case where the designated uploading path is valid, the remote loading server 470 uploads the contents of the shared information

text from a specific location of its storage unit to the URL indicative of the uploading location in the service server 450 at step S222.

Subsequently, in order to notify the working state to the service server 450, the remote loading server 470 sends to the service server 450 a remote loading response message including an expanded flag bit set to 1, or $RLR = 1$, at step S223.

Upon receiving the remote loading response message including the expanded flag bit set to 1, or $RLR = 1$, from the remote loading server 470, the service server 450 checks the flag bit and then sends a remote loading response delivery message containing information received from the remote loading server 470 to the mobile telecommunication terminal 400 that has requested the remote loading service, at step S224.

At this time, the remote loading response delivery message sent to the mobile telecommunication terminal 400 includes an expanded flag bit set to 1, or $RLRF = 1$.

Upon receiving the remote loading response delivery message from the service server 450, including the expanded flag bit set to 1, or $RLRF = 1$, the service requesting terminal 400 determines whether the associated remote loading work has been completed. If the associated remote loading work has been completed, the mobile telecommunication terminal 400 informs the information user by changing the indication of the intelligent icon from remote loading progress state to remote loading completion state at step S225.

On the other hand, in the case where it is determined that the service server 450 is not online to the remote loading server 470, the service server 450 sends an error message to the mobile telecommunication terminal 400.

Then, the mobile telecommunication terminal 400 controls the intelligent icon at step S228 to indicate an error state and the service server 450 sends a confirmation message to the terminal 400 at step S229 to confirm at step S230 whether the

information user wants to deliver the remote loading request message to the remote loading server 470 by E-mail. Unless the information user wants to deliver the remote loading request message by E-mail, the service server 450 ends the entire operation. However, if the information user wants to deliver the remote loading request message by E-mail, then the service server 450 requests the mail server 460 for an E-mail service at step S231.

Thereafter, the mail server 460 delivers the remote loading request message to the remote loading server 470 by E-mail at step S232 and the entire operation ends.

On the other hand, in the case where it is determined that the uploading path designated by the service server 450 is not valid, the remote loading server 470 sends an error message to the service server 450 at step S226.

Upon receiving the error message from the remote loading server 470, the service server 450 sends it further to the mobile telecommunication terminal 400 at step S227.

In response to the error message from the service server 450, the mobile telecommunication terminal 400 controls the intelligent icon at step S228 to indicate an error state, and the service server 450 sends a confirmation message to the terminal 400 at step S229 to confirm at step S230 whether the information user wants to deliver the remote loading request message to the remote loading server 470 by E-mail. Unless the information user wants to deliver the remote loading request message by E-mail, the service server 450 ends the entire operation. In the case where the information user wants to deliver the remote loading request message by E-mail, the service server 450 requests the service server 460 for an E-mail service at step S231.

Subsequently, the mail server 460 delivers the remote loading request message to the remote loading server 470 by E-mail at step S232 and the entire operation ends.

On the other hand, the service server 450 may show a remote loading situation

of the shared information text from a local or remote backup space using a graph or icon. The service server 450 may also show a storage tree indicative of storage structures and connection states of target computers for the remote loading of the shared information text

5 Although said another embodiment of the present invention describes only the case of remote loading operation, the present invention may also selectively perform a multiple loading operation.

Further, although the above embodiment of the present invention describes the remote loading method using a mobile telecommunication terminal, it may be
10 implemented in the same manner using PDA products having insufficient memory capacity as well.

Also, in the above embodiments of the present invention, a shared information text from a plurality of remote loading servers is stored in neither a client nor a mobile telecommunication terminal, but directly uploaded to a service server. As an
15 alternative, either the client or mobile telecommunication terminal may comprise a caching memory (RAM or disc) in which the shared information text from the remote loading servers is first stored and then uploaded to the service server.

In other words, an information user accesses the service server and searches it for an uploading location for shared information. The information user receives
20 information about the uploading location from the service server and stores it in the client or mobile telecommunication terminal. Then, the information user sets up a transfer path between the client or mobile telecommunication terminal and a selected one of the remote loading servers and sends the uploading location information to the selected remote loading server, thereby allowing the selected loading server to upload
25 the shared information to the uploading location in the service server.

Alternatively, the information user may access the service server, search it for

an uploading location for shared information, receive information about the uploading location from the service server, store it in the client or mobile telecommunication terminal, set up a transfer path between the client or mobile telecommunication terminal and a selected one of the remote loading servers, and send the uploading
 5 location information to the selected remote loading server so that the selected loading server can upload the shared information to the uploading location in the service server by E-mail.

Alternatively, the information user may access the service server, search it for an uploading location for shared information, receive information about the uploading
 10 location from the service server, store it in the client or mobile telecommunication terminal, set up a transfer path between the client or mobile telecommunication terminal and a selected one of the remote loading servers, receive the shared information from the selected remote loading server, and upload the received information to the uploading location in the service server.

Alternatively, the information user may access the service server, search it for an uploading location for shared information, receive information about the uploading location from the service server, store it in the client or mobile telecommunication terminal, set up a transfer path between the client or mobile telecommunication terminal and a selected one of the remote loading servers, receive the shared
 20 information from the selected remote loading server, and upload the received information to the uploading location in the service server by E-mail.

In another embodiment of the present invention, a search engine having the following construction is proposed for remote loading of shared information using a mobile telecommunication terminal:

25 A general mobile telecommunication terminal may have difficulty in displaying a large amount of data because it has limited buffer space for display. In

order to overcome this difficulty, the database or search engine of the new mobile telecommunication service comprises a new constituting element, "text abstract (e.g., Web abstract)", in addition to the original information text.

Consequently, in case the user needs to remotely load an information text, all the contents of the information text are remotely loaded from remote loading servers according to said embodiment of the present invention.

Fig. 9 is a drawing showing an Internet network to which the method for duplicate storing of information searched and accessed on the Internet in accordance with another embodiment of the present invention applies and Figs. 10a and 10b are flowcharts illustrating the duplicate storage method in accordance with said embodiment of the present invention.

First, an information searcher accesses a desired one of service servers 510a-510n on the Internet 530 such as Web servers, using a client 499 at step S300 and searches the accessed service server (hereinafter, "510") for desired information using a Web browser or search engine at step S301.

The used Web browser or search engine may preferably be a new or expanded client program that provides the information searcher with a duplicate storage menu or icon and, when a duplicate storage service is in progress, with an intelligent icon indicative of the progress state.

If the information searcher has found the desired information, he selects the information to be stored from the searched information at step S302 and clicks on the duplicate storage menu or icon to request the accessed service server 510 for a duplicate storage service at step S303.

Preferably, a new or expanded transfer protocol may be used for transfer of information between the client 499 and the service server 510 and have an expanded field for enabling the client 499 to request the service server 510 to execute a duplicate

storage function.

The expanded field may include a flag bit (hereinafter, “DS”) indicative of the execution of the duplicate storage function. For example, when the client 499 sets the flag bit to 1, or DS = 1, the service server 510 runs a duplicate storage server program capable of additionally performing the duplicate storage function.

When the client 499 requests the accessed service server 510 for a duplicate storage service, it sends to the service server 510 URLs of the remote site servers 500a-500n for duplicate storage and a URL indicative of the location of the information text to be stored in the service server 510, together with other additional information at step S304.

Upon receiving the duplicate storage service request from the client 499, the accessed service server 510 checks the flag bit in the expanded field and runs the duplicate storage server program at step S305 if the flag bit has been set to 1. As a result, the service server 510 checks the status of each of the duplicate storage servers 500a-500n desired by the client 499 at step S306 to determine whether it is online to the respective duplicate storage servers 500a-500n. If the service server 510 is online to the respective duplicate storage servers 500a-500n, then it sets up a storage path with each of the servers 500a-500n at step S307.

Preferably, a new or expanded transfer protocol may be used for transfer of information between the service server 510 and each of the duplicate storage servers 500a-500n and have an expanded field for enabling the service server 510 to request each of the duplicate storage servers 500a-500n to execute a duplicate storage function.

The expanded field may include a flag bit (hereinafter, “DSF”) indicative of the execution of the duplicate storage function. For example, when the service server 510 sets the flag bit to 1, or DSF = 1, each of the duplicate storage servers 500a-500n

runs a duplicate storage server program capable of additionally performing the duplicate storage function.

After setting up the storage paths with the duplicate storage servers 500a-500n, the service server 510 sets the flag bit in the expanded field to 1, or DSF = 1, and
5 sends to each of the duplicate storage servers 500a-500n a duplicate storage request message containing a URL indicative of a storage location of the information text in each of the servers 500a-500n, an IP address of the server 510, the contents of the information text to be stored and other additional information, at steps S308 and S309.

Upon receiving the duplicate storage request message from the service server
10 510, each of the duplicate storage servers 500a-500n checks the flag bit in the expanded field of the received request message and runs the duplicate storage server program at step S310 if the flag bit has been set to 1, or DSF = 1. As a result, each of the duplicate storage servers 500a-500n checks the status of an associated one of the storage paths designated by the service server 510 at step S311 to determine whether it
15 is valid. In case the associated storage path is valid, each of the duplicate storage servers 500a-500n stores the contents of the information text received from the service server 510 in a specific location of its storage unit at step S312.

Thereafter, in order to notify the working state, each of the duplicate storage servers 500a-500n sends to the service server 510 a duplicate storage response
20 message including an expanded flag bit set to 1, or DSR = 1, at step S313.

Upon receiving the duplicate storage response message including the expanded flag bit set to 1, or DSR = 1, from each of the duplicate storage servers 500a-500n, the service server 510 checks the flag bit and then sends a duplicate storage response delivery message containing information received from each of the duplicate storage
25 servers 500a-500n to the client 499 that has requested the duplicate storage service, at step S314.

At this time, the duplicate storage response delivery message sent to the client 499 includes an expanded flag bit set to 1, or DSRF = 1.

Upon receiving the duplicate storage response delivery message including the expanded flag bit set to 1, or DSRF = 1, from the service server 510, the service requesting client 499 determines whether the associated duplicate storage work has been completed. If the associated duplicate storage work has been completed, the client 499 informs the information searcher by changing the indication of the intelligent icon from duplicate storage progress state to duplicate storage completion state at step S315.

On the other hand, in the case where it is determined that the service server 510 is not online to any one of the duplicate storage servers 500a-500n, the service server 510 sends an error message to the client 499.

In response to the error message from the service server 510, the client 499 controls the intelligent icon at step S318 to indicate an error state, and the service server 510 sends a confirmation message to the client 499 at step S319 to confirm at step S320 whether the information searcher wants to deliver the information text to the not-online duplicate storage server by E-mail. Unless the information searcher wants to deliver the information text by E-mail, the service server 510 ends the entire operation. However, if the information searcher wants to deliver the information text by E-mail, the service server 510 requests the mail server 520 for an E-mail service at step S321.

Subsequently, the mail server 520 delivers the information text to the not-online duplicate storage server by E-mail at step S322 and the entire operation ends.

On the other hand, in the case where it is determined that any one of the storage paths designated by the service server 510 is not valid, the associated one of the duplicate storage servers 500a-500n sends an error message to the service server

510 at step S316.

Upon receiving the error message from the associated duplicate storage server, the service server 510 sends it further to the client 499 at step S317.

In response to the error message from the service server 510, the client 499 controls the intelligent icon at step S318 to indicate an error state, and the service server 510 sends a confirmation message to the client 499 at step S319 to confirm at step S320 whether the information searcher wants to deliver the information text to the associated duplicate storage server by E-mail. Unless the information searcher wants to deliver the information text by E-mail, the service server 510 ends the entire operation. In the case where the information searcher wants to deliver the information text by E-mail, the service server 510 requests the mail server 520 for an E-mail service at step S321.

Thereafter, the mail server 520 delivers the information text to the associated duplicate storage server by E-mail at step S322 and the entire operation ends.

On the other hand, the service server 510 may show a storage situation of searched information in a local or remote backup space using a graph or icon. The service server 510 may further show a storage tree indicative of storage structures and connection states of target computers in which the searched information is to be stored duplicate.

Although said another embodiment of the present invention describes only the case of duplicate storing of the searched information, the present invention may also be implemented to duplicate printing as well as storing of the searched information, or to duplicate printings of the searched information only.

Fig. 11 is a diagram showing a wireless Internet network to which the method for duplicate storing of the information searched and accessed on the Internet in accordance with another embodiment of the present invention applies and Figs. 12a

and 12b are flowcharts illustrating the duplicate storage method in accordance with said embodiment of the present invention.

Said wireless Internet network comprises: a mobile telecommunication terminal 600, equipped with an external command input unit for inputting external
5 command, said terminal 600 converts the inputted command into a RF signal suitable to a data service and transmits the converted RF signal, a base transceiver station 610 which receives the RF signal transmitted from the mobile telecommunication terminal 600 and demodulates it into the original command, a wireless network 620 which functions to output the command demodulated by the base transceiver station 610
10 together with an ID number of the mobile telecommunication terminal 600 according to a protocol for an Internet service; a gateway 630 which acts to receive an output signal from the wireless network 620 and converts the received signal into a TCP/IP signal or HTTP signal suitable to Internet connection; the Internet 640 which connects the gateway 630 to other networks for execution of an operation associated with a
15 command from the gateway 630; a service server 650, which may preferably be a Web server and provide information in response to the command from the Internet 640; a mail server 660 and a plurality of duplicate storage servers 670a-670n.

First, an information searcher accesses the service server 650 on the Internet 640 using the mobile telecommunication terminal 600 at step S410 and searches the
20 accessed service server 650 for desired information using a Web browser or search engine at step S411.

The used Web browser or search engine may preferably be a new or expanded client program that provides the information searcher with a duplicate storage menu or icon and, when a duplicate storage service is in progress, with an intelligent icon
25 indicative of the progress state.

If the information searcher has found the desired information, he selects the

information to be stored in a duplicate manner from the searched information at step S412 and clicks on the duplicate storage menu or icon to request the service server 650 for a duplicate storage service at step S413.

A new or expanded transfer protocol may preferably be used for the transfer of
5 information between the mobile telecommunication terminal 600 and the service server 650 and have an expanded field for enabling the terminal 600 to request the service server 650 to execute a duplicate storage function.

The expanded field may include a flag bit (hereinafter, "DS") indicative of the execution of the duplicate storage function. For example, when the mobile
10 telecommunication terminal 600 sets the flag bit to 1, or DS = 1, the service server 650 runs a duplicate storage server program capable of additionally performing the duplicate storage function

When the mobile telecommunication terminal 600 requests a duplicate storage service of the service server 650, it sends to the service server 650 URLs of the
15 duplicate storage servers 670a-670n and a URL indicative of the location of an information text to be stored in the service server 650, together with other additional information at step S414.

Upon receiving the duplicate storage service request from the mobile telecommunication terminal 600, the service server 650 checks the flag bit in the
20 expanded field and runs the duplicate storage server program at step S415 if the flag bit has been set to 1. As a result, the service server 650 checks the status of each of the duplicate storage servers 670a-670n desired by the mobile telecommunication terminal 600 at step S416 to determine whether it is online to the respective duplicate storage servers 670a-670n. If the service server 650 is online to the respective
25 duplicate storage servers 670a-670n, then it sets up a storage path with each of the servers 670a-670n at step S417.

10 A new or expanded transfer protocol may preferably be used for the transfer of information between the service server 650 and each of the duplicate storage servers 670a-670n and have an expanded field for enabling the service server 650 to request each of the duplicate storage servers 670a-670n to execute a duplicate storage
5 function.

10 The expanded field may include a flag bit (hereinafter, "DSF") indicative of the execution of the duplicate storage function. For example, when the service server 650 sets the flag bit to 1, or $DSF = 1$, each of the duplicate storage servers 670a-670n runs a duplicate storage server program capable of additionally performing the
10 duplicate storage function.

15 After setting up the storage paths with the duplicate storage servers 670a-670n, the service server 650 sets the flag bit in the expanded field to 1, or $DSF = 1$, and sends to each of the duplicate storage servers 670a-670n a duplicate storage request message containing a URL indicative of a storage location of the information text in each of the servers 670a-670n, an IP address of the server 650, the contents of the
15 information text to be stored and other additional information, at steps S418 and S419, respectively.

20 Upon receiving the duplicate storage request message from the service server 650, each of the duplicate storage servers 670a-670n checks the flag bit in the expanded field of the received request message and runs the duplicate storage server program at step S420 if the flag bit has been set to 1, or $DSF = 1$. As a result, each of the duplicate storage servers 670a-670n checks the status of the associated storage paths designated by the service server 650 at step S421 to determine whether it is valid. In the case where the associated storage path is valid, each of the duplicate
25 storage servers 670a-670n stores the contents of the information text received from the service server 650 in a specific location of its storage unit at step S422.

Subsequently, in order to notify the working state to the service server 650, each of the duplicate storage servers 670a-670n sends to the service server 650 a duplicate storage response message including an expanded flag bit set to 1, or DSR = 1, at step S423.

5 Upon receiving the duplicate storage response message including the expanded flag bit set to 1, or DSR = 1, from each of the duplicate storage servers 670a-670n, the service server 650 checks the flag bit and then sends a duplicate storage response delivery message containing information received from each of the duplicate storage servers 670a-670n to the mobile telecommunication terminal 600 that has requested
10 the duplicate storage service, at step S424.

At this time, the duplicate storage response delivery message sent to the mobile telecommunication terminal 600 includes an expanded flag bit set to 1, or DSRF = 1.

Upon receiving the duplicate storage response delivery message from the service server 650, including the expanded flag bit set to 1, or DSRF = 1, the service
15 requesting terminal 600 determines whether the associated duplicate storage work has been completed. If the associated duplicate storage work has been completed, the mobile telecommunication terminal 600 informs the information searcher by changing the indication of the intelligent icon from duplicate storage progress state to duplicate storage completion state at step S425.

20 On the other hand, in the case where it is determined that the service server 650 is not online to any one of the duplicate storage servers 670a-670n, the service server 650 sends an error message to the mobile telecommunication terminal 600.

Then, the mobile telecommunication terminal 600 controls the intelligent icon at step S428 to indicate an error state and the service server 650 sends a confirmation
25 message to the terminal 600 at step S429 to confirm at step S430 whether the information searcher wants to deliver the information text to the not-online duplicate

storage server by E-mail. Unless the information searcher wants to deliver the information text by E-mail, the service server 650 ends the entire operation. However, if the information searcher wants to deliver the information text by E-mail, then the service server 650 requests the mail server 660 for an E-mail service at step S431.

5 Thereafter, the mail server 660 delivers the information text to the not-online duplicate storage server by E-mail at step S432 and the entire operation ends.

On the other hand, in the case where it is determined that any one of the storage paths designated by the service server 650 is not valid, an associated one of the duplicate storage servers 670a-670n sends an error message to the service server
10 650 at step S426.

Upon receiving the error message from the associated duplicate storage server, the service server 650 sends it further to the mobile telecommunication terminal 600 at step S427.

In response to the error message from the service server 650, the mobile
15 telecommunication terminal 600 controls the intelligent icon at step S428 to indicate an error state, and the service server 650 sends a confirmation message to the terminal 600 at step S429 to confirm at step S430 whether the information searcher wants to deliver the information text to the associated duplicate storage server by E-mail. Unless the information searcher wants to deliver the information text by E-mail, the
20 service server 650 ends the entire operation. In the case where the information searcher wants to deliver the information text by E-mail, the service server 650 requests the mail server 660 for an E-mail service at step S431.

Subsequently, the mail server 660 delivers the information text to the associated duplicate storage server by E-mail at step S432 and the entire operation
25 ends.

On the other hand, the service server 650 may show storage situation of the

searched information in a local or remote backup space using a graph or icon. The service server 650 may also show a storage tree indicative of storage structures and connection states of target computers in which the searched information is to be duplicately stored.

5 Although said another embodiment of the present invention describes only the case of duplicate storing of the searched information, the present invention may also be implemented to duplicate printing as well as storing of the searched information, or to duplicate printings of the searched information only.

10 Further, although the above embodiment of the present invention describes the duplicate storage method using a mobile telecommunication terminal, the present invention can be implemented in the same manner using PDA products having an insufficient memory capacity as well.

15 Also, in the above embodiments of the present invention, a desired information text from a service server is stored in neither a client nor a mobile telecommunication terminal, but directly stored in remote site duplicate storage servers in a duplicate manner. As an alternative, either the client or mobile telecommunication terminal may comprise a caching memory (RAM or disc) in which the desired information text from the service server may be first stored and then duplicate stored in remote-site duplicate storage clients.

20 In other words, an information searcher accesses the service server and searches it for desired information. The information searcher receives the searched information from the service server and stores it in the client or mobile telecommunication terminal. Then, the information searcher sets up transfer paths between the client or mobile telecommunication terminal and the remote site duplicate storage clients, respectively, and stores the searched information duplicate in the
25 remote site clients along the set up transfer paths.

Alternatively, the information searcher may access the service server, search it for desired information, receive the searched information from the service server, store it in the client or mobile telecommunication terminal and send the searched information to the remote site duplicate storage clients by E-mail.

5 In the above embodiment of the present invention, the a search engine having the following construction is proposed for search and duplicate storage of information using a mobile telecommunication terminal:

 A general mobile telecommunication terminal may have difficulty in displaying a large amount of data because it has limited buffer space for display. In
10 order to overcome this difficulty, the database or search engine of the new mobile telecommunication service comprises a new constituting element, "text abstract (e.g., Web abstract)", in addition to the original information text, in contrast to a conventional information text.

 Accordingly, in the case where an information searcher accesses a desired
15 information text using his mobile telecommunication terminal, an associated service server provides primarily only an information keyword or information abstract element to the terminal.

 Subsequently, in the case where the information searcher requests a duplicate storage of the information text, the service server stores primarily all the contents or
20 constituting elements of the information text such as the information keyword, the information abstract, the contents of the information text, etc. into remote-site duplicate storage clients according to said embodiment of the present invention.

 Although the above embodiments of the present invention have been described for illustrative purposes, those skilled in the art will appreciate that various
25 modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as described in the accompanying claims. For

example, the present invention is not restricted to Web servers and Web browsers.

INDUSTRIAL APPLICABILITY

5 As apparent from the above description, the present invention discloses an information search/storage system capable of providing a more convenient interface to information user than that of a conventional system as well as storing information desired by the user rapidly, safely and readily.

10 Further, according to the present invention, a software can easily be expanded through implementation of the software alone, requiring no variation in the existing communication environments.

Further, the present invention provides a base technique for the activation of a diversified and improved information search/storage technology by computer, thereby activating use of mobile terminals or portable terminals having insufficient resources.

15 Further, the present invention has the effect of maximizing mobility of an information searcher, avoiding unnecessary and duplicate search of information as much as possible and maximizing the utilization efficiency of mobile telecommunication terminals which have simple and fundamental constructions.

20 Further, the present invention has the effect of allowing information searchers to overcome restrictions in time and space in respect to their access to and storage of information, thereby maximizing the work efficiency of the information searchers and enhancing economic productivity of these searchers.

25 Further, the present invention discloses an information search/storage system which is capable of providing an interface more convenient than that of a conventional system to information user and capable of multiple loading information desired by the user from a plurality of distributed sites desired by the user, rapidly, safely and

readily.

Further, the present invention provides a base technique for the activation of a diversified and improved information search/storage (including uploading) technology by computer, thereby activating use of mobile terminals or portable terminals having
5 insufficient resources.

Further, the present invention has the effect of maximizing mobility of an information user, avoiding unnecessary and duplicate storage or uploading of information as much as possible and maximizing the utilization efficiency of mobile telecommunication terminals which have simple and fundamental constructions

10 Further, the present invention has the effect of allowing information users to overcome restrictions in time and space in respect to their access to and uploading of information, thereby maximizing the work efficiency of the information users and enhancing the economic productivity of these users.

Further, the present invention allows an information user, in the case where an
15 attempt to connect to a specific remote loading server fails or a connection thereto is interrupted due to a change in communication environments or to other defects, to gain uploading access to same information stored in other remote loading servers in a duplicate manner, and thereby enables said information user to overcome the restrictions in time and space and to have uploading access to said information, and
20 thus leads to maximize the work efficiency of the information user and to enhance the economic productivity of the user.

Further, the present invention discloses an information search/storage system which is capable of providing an interface more convenient than that of a conventional system to information user and duplicate storing information desired by the user in a
25 plurality of distributed sites desired by the user rapidly, safely, and readily

Further, the present invention allows information searcher, in the case where

an attempt to connect to a specific server fails or a connection thereto is interrupted due to a change in communication environments or due to other defects, to gain access to the same information stored in different servers, and thereby enables the information searcher to overcome restrictions in time and space and to have an access
5 to said information, and thus leads to maximize the work efficiency of the information searcher and to enhance the economic productivity of the searcher.

What is claimed is:

1. A method for remote storing of information comprising the steps of:

a) allowing an information searcher to access a Web server and search it for
5 desired information;

b) allowing said information searcher to request said Web server for a remote
storage service;

c) allowing said information searcher to send to said Web server a uniform
resource locator of the searched information and a uniform resource locator of a
10 remote-site server in which said searched information is to be stored;

d) allowing said Web server to set up a storage path with said remote-site
server under the condition that it is online to said remote-site server and to send a
remote storage request message to said remote-site server;

e) allowing said Web server to send to said remote-site server a Web text to be
15 stored and a uniform resource locator indicative of a storage location of the Web text
in said remote-site server; and

f) allowing said remote-site server to store said Web text if said storage path
set-up by said Web server is valid.

20 2. A method for remote storing of information as set forth in Claim 1,
comprising an additional step g) of allowing said remote-site server to send a storage
completion message to said information searcher via said Web server after storing said
Web text.

25 3. A method for remote storing of information as set forth in Claim 1, wherein
said step a) includes the step of allowing said information searcher to access said Web

server using a mobile telecommunication terminal.

4. A method for remote storing of information as set forth in Claim 2, wherein
said step a) includes the step of allowing said information searcher to access said Web
5 server using a mobile telecommunication terminal.

5. A method for remote storing of information as set forth in Claim 1, wherein
said step a) includes the step of allowing said information searcher to access said Web
server using a personal information terminal.

10 6. A method for remote storing of information as set forth in Claim 2, wherein
said step a) includes the step of allowing said information searcher to access said Web
server using a personal information terminal.

15 7. A method for remote storing of information as set forth in any one of Claim
1 to Claim 6, comprising further steps of:

h) allowing said Web server to send an error message to said information
searcher if it is not online to said remote-site server after said step c) is performed;

i) allowing said Web server to confirm whether said information searcher
20 desires an electronic mail service; and

j) allowing said Web server to send said Web text to said remote-site server by
electronic mail via a mail server if said information searcher desires said electronic
mail service.

25 8. A method for remote storing of information as set forth in any one of Claim
1 to Claim 6, comprising further steps of:

h) allowing said remote-site server to send an error message to said information searcher via said Web server if said storage path set-up by said Web server is not valid after said step e) is performed;

i) allowing said Web server to confirm whether said information searcher
5 desires an electronic mail service; and

j) allowing said Web server to send said Web text to said remote-site server by electronic mail via a mail server if said information searcher desires said electronic mail service.

10 9. A method for remote storing of information as set forth in Claim 7, comprising further steps of:

k) allowing said remote-site server to send an error message to said information searcher via said Web server if said storage path set-up by said Web server is not valid after said step e) is performed;

15 l) allowing said Web server to confirm whether said information searcher desires said electronic mail service; and

m) allowing said Web server to send said Web text to said remote-site server by electronic mail via said mail server if said information searcher desires said electronic mail service.

20

10. A method for remote storing of information comprising the steps of:

a) allowing an information searcher to access a Web server and search it for desired information;

b) allowing said information searcher to receive and store the searched
25 information from said Web server;

c) allowing said information searcher to set up a transfer path with a remote-

site server in which the searched information is to be stored; and

d) allowing said information searcher to store said searched information in said remote-site server along with the set-up transfer path.

5 11. A method for remote storing of information comprising the steps of

a) allowing an information searcher to access a Web server and search it for desired information;

b) allowing said information searcher to receive and store the searched information from said Web server; and

10 c) allowing said information searcher to send the searched information by electronic mail to a remote-site server into which said searched information is to be stored.

12. A method for remote loading of information comprising the steps of:

15 a) allowing an information user to access a service server and search it for an uploading location of shared information;

b) allowing said information user to request said service server for a remote loading service;

20 c) allowing said information user to send to said service server a uniform resource locator indicative of said uploading location for the shared information in said service server and uniform resource locators of a plurality of remote loading servers having said shared information;

25 d) allowing said service server to set up an uploading path with any one of said remote loading servers selected by said information user under the condition that it is online to the selected remote loading server and to send a remote loading request message to said selected remote loading server;

e) allowing said selected remote loading server to send to said service server a shared information text to be remotely uploaded and a uniform resource locator indicative of the uploading location for the shared information text in said service server; and

5 f) allowing said service server to store said shared information text if said uploading path is valid.

13. A method for remote loading of information as set forth in Claim 12, comprising a further step g) of allowing said selected remote loading server to send an
10 uploading completion message to said information user via said service server after uploading said shared information text.

14. A method for remote loading of information as set forth in Claim 12, wherein said step a) includes the step of allowing said information user to access said
15 service server using a mobile telecommunication terminal.

15. A method for remote loading of information as set forth in Claim 13, wherein said step a) includes the step of allowing said information user to access said service server using a mobile telecommunication terminal.
20

16. A method for remote loading of information as set forth in Claim 12, wherein said step a) includes the step of allowing said information user to access said service server using a personal information terminal.

25 17. A method for remote loading of information as set forth in Claim 13, wherein said step a) includes the step of allowing said information user to access said

service server using a personal information terminal.

18. A method for remote loading of information as set forth in any one of Claim 12 to Claim 17, comprising further steps of:

5 h) allowing said service server to send an error message to said information user if it is not online to said selected remote loading server after said step c) is performed;

i) allowing said service server to confirm whether said information user desires an electronic mail service; and

10 j) allowing said service server to send said remote loading request message to said selected remote loading server by electronic mail via a mail server if said information user desires said electronic mail service.

19. A method for remote loading of information as set forth in any one of Claim 12 to Claim 17, comprising further steps of:

15 h) allowing said selected remote loading server to send an error message to said information user via said service server if said uploading path set-up by said service server is not valid after said step e) is performed;

20 i) allowing said service server to confirm whether said information user desires an electronic mail service; and

j) allowing said service server to send said remote loading request message to said selected remote loading server by electronic mail via a mail server if said information user desires said electronic mail service.

25 20. A method for remote loading of information as set forth in Claim 18, comprising further steps of:

k) allowing said selected remote loading server to send an error message to said information user via said service server if said uploading path set-up by said service server is not valid after said step e) is performed;

l) allowing said service server to confirm whether said information user desires
5 said electronic mail service; and

m) allowing said service server to send said remote loading request message to said selected remote loading server by electronic mail via said mail server if said information user desires said electronic mail service.

10 21. A method for remote loading of information comprising the steps of:

a) allowing an information user to access a service server and search it for an uploading location for shared information;

b) allowing said information user to receive and store information about said uploading location from said service server;

15 c) allowing said information user to set up a transfer path with a selected remote loading server having said shared information and send said uploading location information to the selected remote loading server; and

d) allowing said selected remote loading server to upload said shared information to said uploading location in said service server if an uploading path to
20 said service server is valid.

22. A method for remote loading of information as set forth in Claim 21, comprising further steps of:

e) allowing said selected remote loading server to send an error message to
25 said information user if said uploading path to said service server is not valid after said step c) is performed;

f) allowing said selected remote loading server to confirm whether said information user desires an electronic mail service; and

g) allowing said selected remote loading server to send said shared information to said service server by electronic mail via a mail server if said information user
5 desires said electronic mail service.

23. A method for remote loading of information comprising the steps of:

a) allowing an information user to access a service server and search it for an uploading location for shared information;

10 b) allowing said information user to receive and store information about said uploading location from said service server;

c) allowing said information user to set up a transfer path with a selected remote loading server having said shared information and receive said shared information from said selected remote loading server; and

15 d) allowing said information user to upload said shared information to said uploading location in said service server if an uploading path to said service server is valid.

24. A method for remote loading of information as set forth in Claim 23,
20 comprising further steps of:

e) informing said information user of an error message if said uploading path to said service server is not valid after said step c) is performed;

f) requesting said information user to confirm whether he wants to use an electronic mail service; and

25 g) allowing said information user to send said shared information to said service server by electronic mail via a mail server if said user confirmed to use the

electronic mail service.

25. A method for remote storing of information comprising the steps of:

- 5 a) allowing an information searcher to access a Web server and search it for desired information;
- b) allowing said information searcher to request said Web server for a remote storage service;
- c) allowing said information searcher to send to said Web server a uniform resource locator of the searched information and uniform resource locators of a plurality of remote-site clients in which said searched information is to be stored;
- 10 d) allowing said Web server to set up storage paths with said remote-site clients, respectively, under the condition that it is online to said respective remote-site clients and send a remote storage request message to each of said remote-site clients;
- e) allowing said Web server to send to each of said remote-site clients a Web text to be stored and a uniform resource locator indicative of a storage location of the Web text in each of said remote-site clients; and
- 15 f) allowing each of said remote-site clients to store said Web text if the corresponding storage path set-up by said Web server is valid.

20 26. A method for remote storing of information as set forth in Claim 25, comprising a further step g) of allowing each of said remote-site clients to send a storage completion message to said information searcher via said Web server after storing said Web text.

25 27. A method for remote storing of information as set forth in Claim 25, wherein said step a) includes the step of allowing said information searcher to access

said Web server using a mobile telecommunication terminal

28. A method for remote storing of information as set forth in Claim 26,
wherein said step a) includes the step of allowing said information searcher to access
5 said Web server using a mobile telecommunication terminal.

29. A method for remote storing of information as set forth in Claim 25,
wherein said step a) includes the step of allowing said information searcher to access
said Web server using a personal information terminal.

30. A method for remote storing of information as set forth in Claim 26,
wherein said step a) includes the step of allowing said information searcher to access
said Web server using a personal information terminal.

31. A method for remote storing of information as set forth in any one of
Claim 25 to Claim 30, comprising further steps of:

h) allowing said Web server to send an error message to said information
searcher if it is not online to any one of said remote-site clients after said step c) is
performed;

i) allowing said Web server to confirm whether said information searcher
desires an electronic mail service; and

j) allowing said Web server to send said Web text to said not-online remote-
site client by electronic mail via a mail server if said information searcher desires said
electronic mail service.

32. A method for remote storing of information as set forth in any one of

Claim 25 to Claim 30, comprising further steps of:

h) allowing any one of said remote-site clients to send an error message to said information searcher via said Web server if the associated storage path set-up by said Web server is not valid after said step e) is performed;

5 i) allowing said Web server to confirm whether said information searcher desires an electronic mail service; and

j) allowing said Web server to send said Web text to said remote-site client associated with said invalid storage path by electronic mail via a mail server if said information searcher desires said electronic mail service.

10

33. A method for remote storing of information as set forth in Claim 31, comprising further steps of:

k) allowing any one of said remote-site clients to send an error message to said information searcher via said Web server if the associated storage path set-up by said Web server is not valid after said step e) is performed;

15 l) allowing said Web server to confirm whether said information searcher desires said electronic mail service; and

m) allowing said Web server to send said Web text to said remote-site client associated with said invalid storage path by electronic mail via said mail server if said information searcher desires said electronic mail service

20

34. A method for remote storing of information comprising the steps of:

a) allowing an information searcher to access a Web server and search it for desired information;

25 b) allowing said information searcher to receive and store the searched information from said Web server;

c) allowing said information searcher to set up transfer paths with a plurality of remote-site clients in which the searched information is to be stored, respectively; and

d) allowing said information searcher to store said searched information in said remote-site clients along with the set-up transfer paths.

5

35. A method for remote storing of information comprising the steps of:

a) allowing an information searcher to access a Web server and search it for desired information;

b) allowing said information searcher to receive and store the searched
10 information from said Web server; and


c) allowing said information searcher to send the searched information by electronic mail to a plurality of remote-site clients in which said searched information is to be stored.

Abstract


A method for remotely storing information searched on the Internet. An information searcher accesses a Web server (110) and searches it for desired information. The information searcher requests a remote storage service of the Web server. Then, the information searcher sends to the Web server a URL of the searched information and a URL of a remote-site server (100) into which the searched information is to be stored. The Web server (110) sets up a storage path with the remote-site server (100) under the condition that it is online to the remote-site server and sends a remote storage request message to the server (100). The Web server sends to the remote-site server a Web text to be stored and a URL indicative of a storage location for the Web text in the remote-site server. If the storage path is valid, then the remote-site server stores the Web text.

【DRAWINGS】


【Fig. 1】

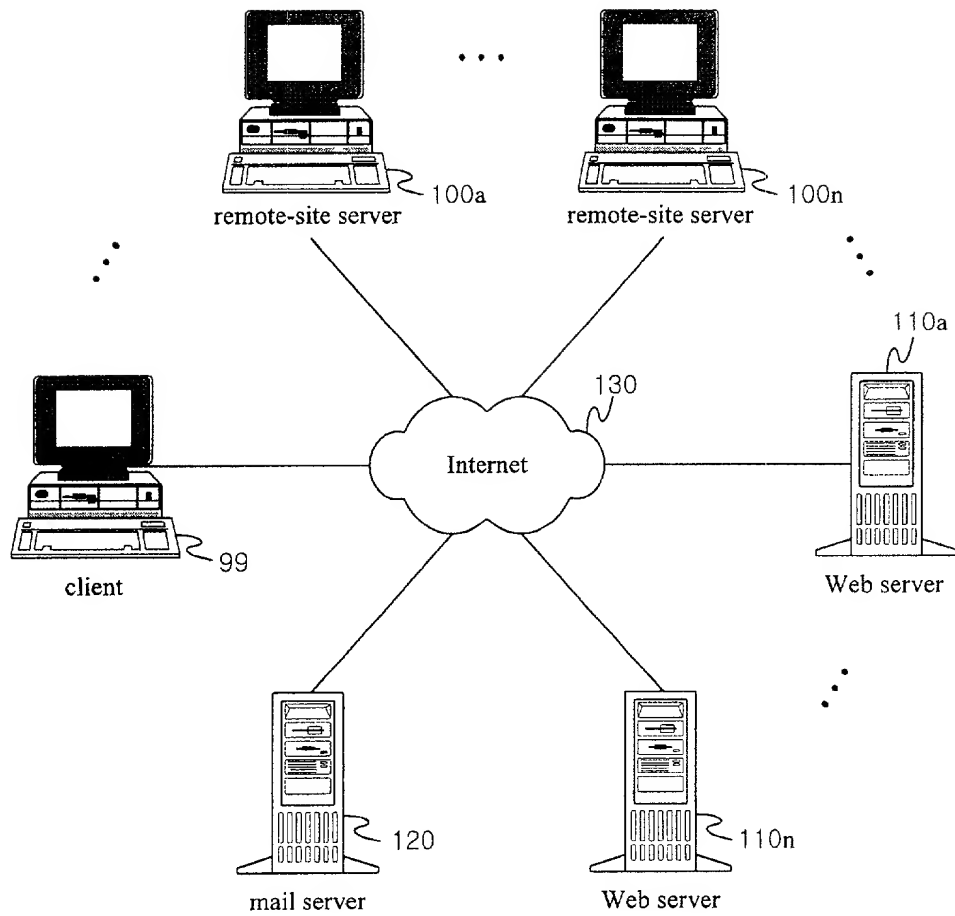


【Fig. 2a】

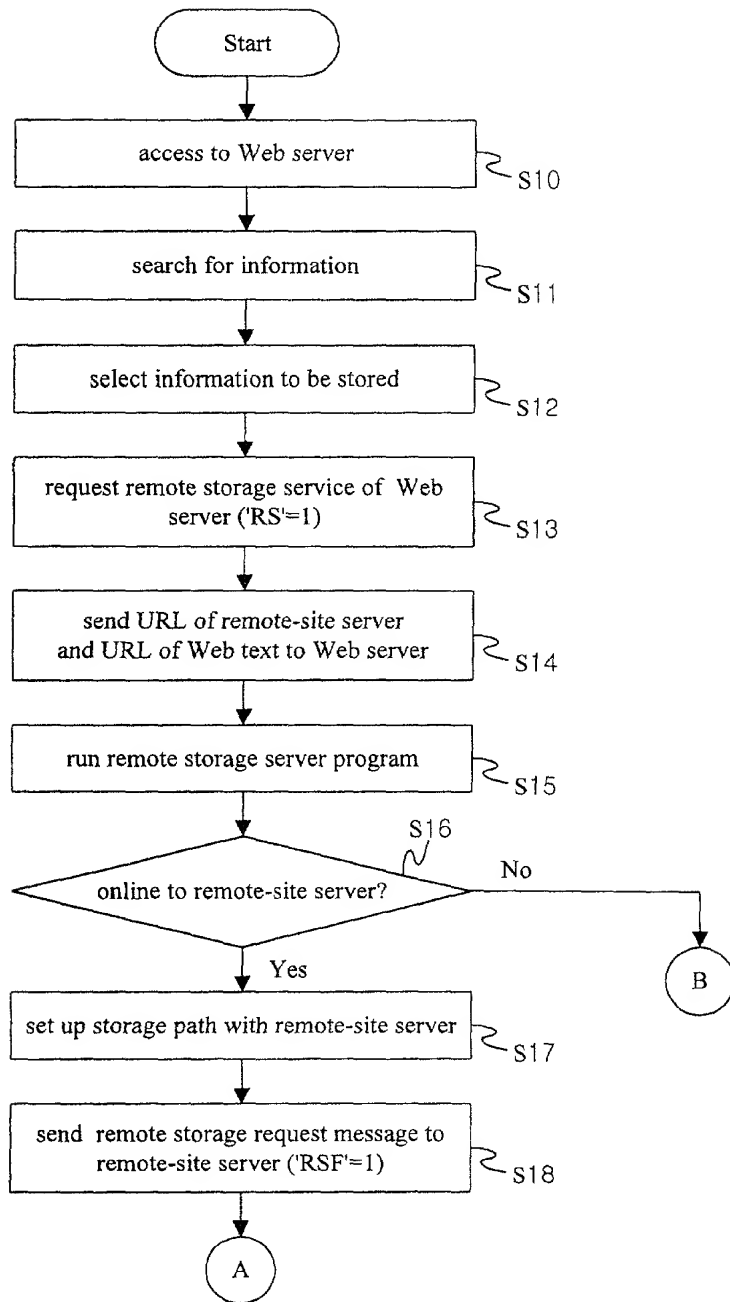


【Fig. 2b】

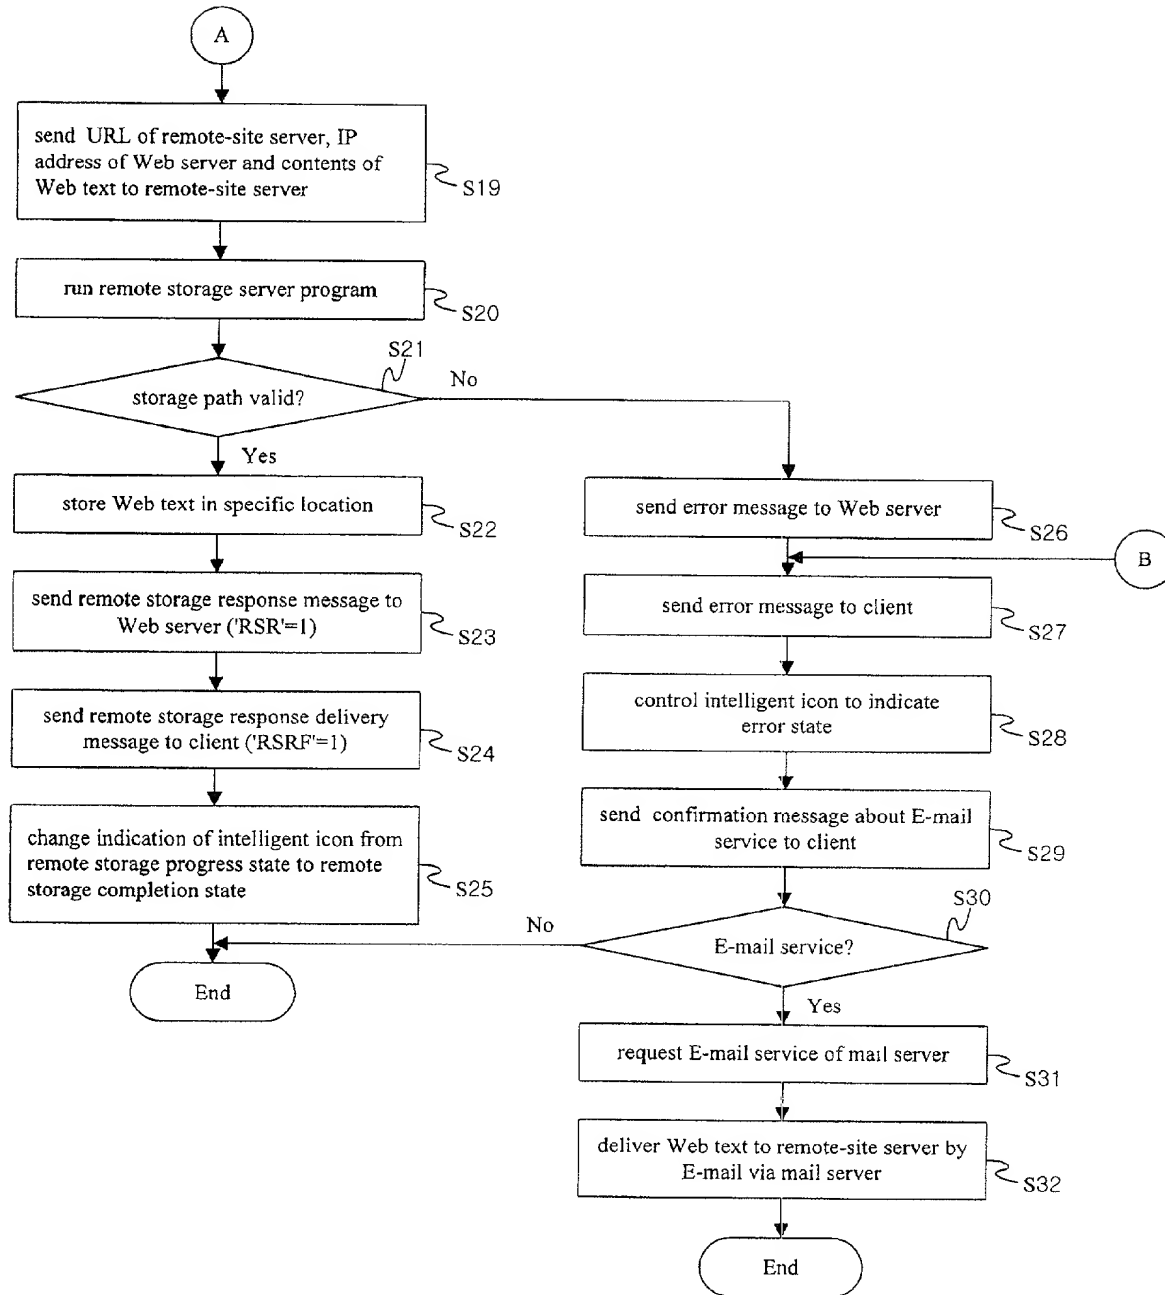


【Fig. 3】

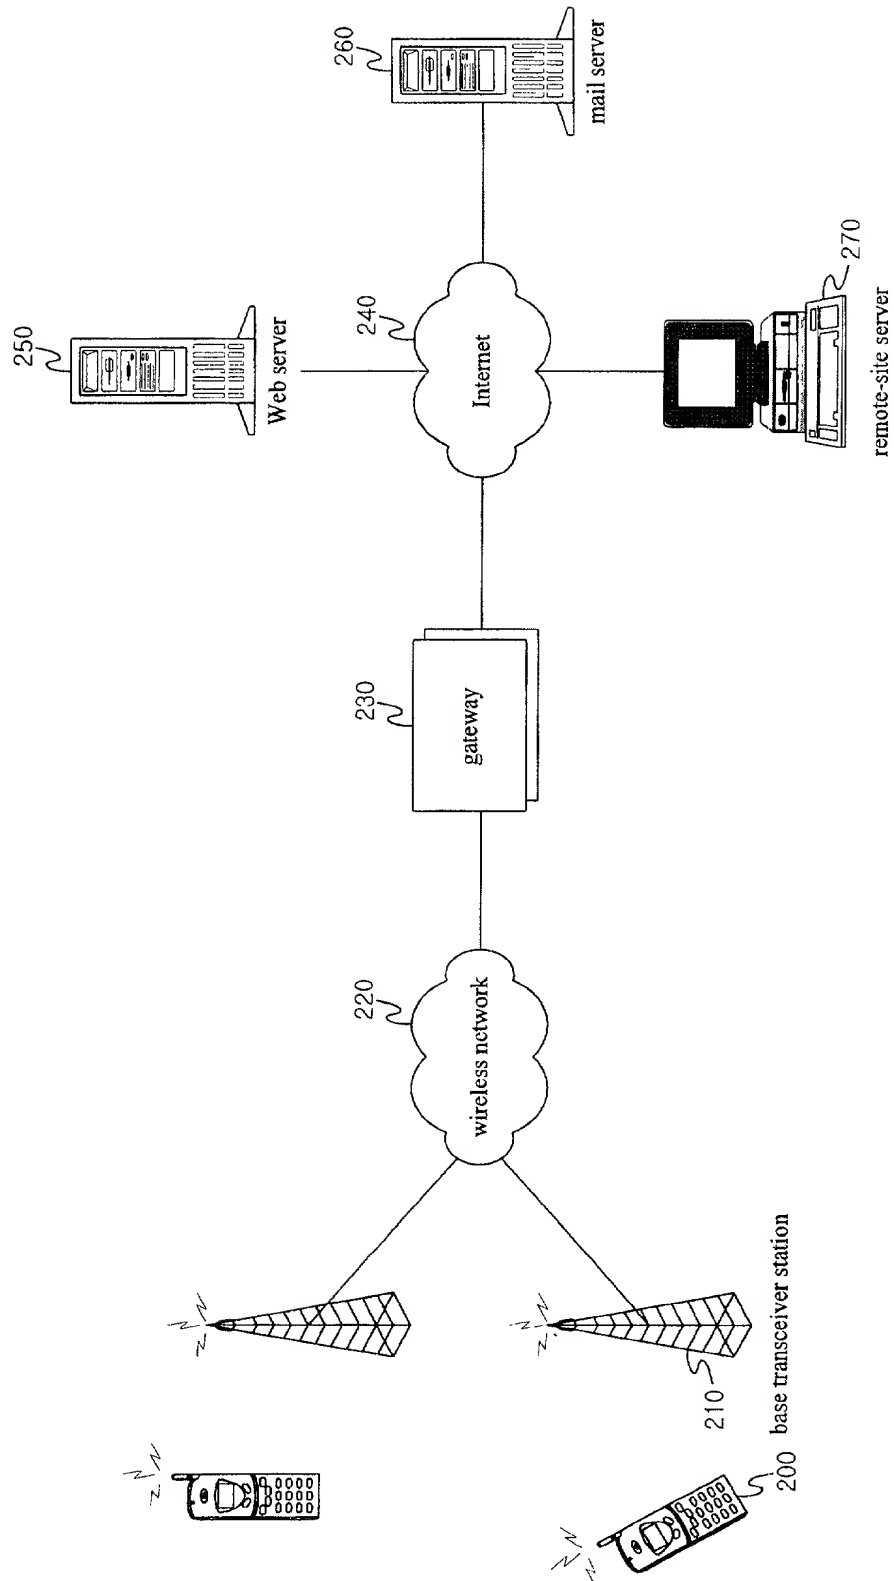


【Fig. 4a】

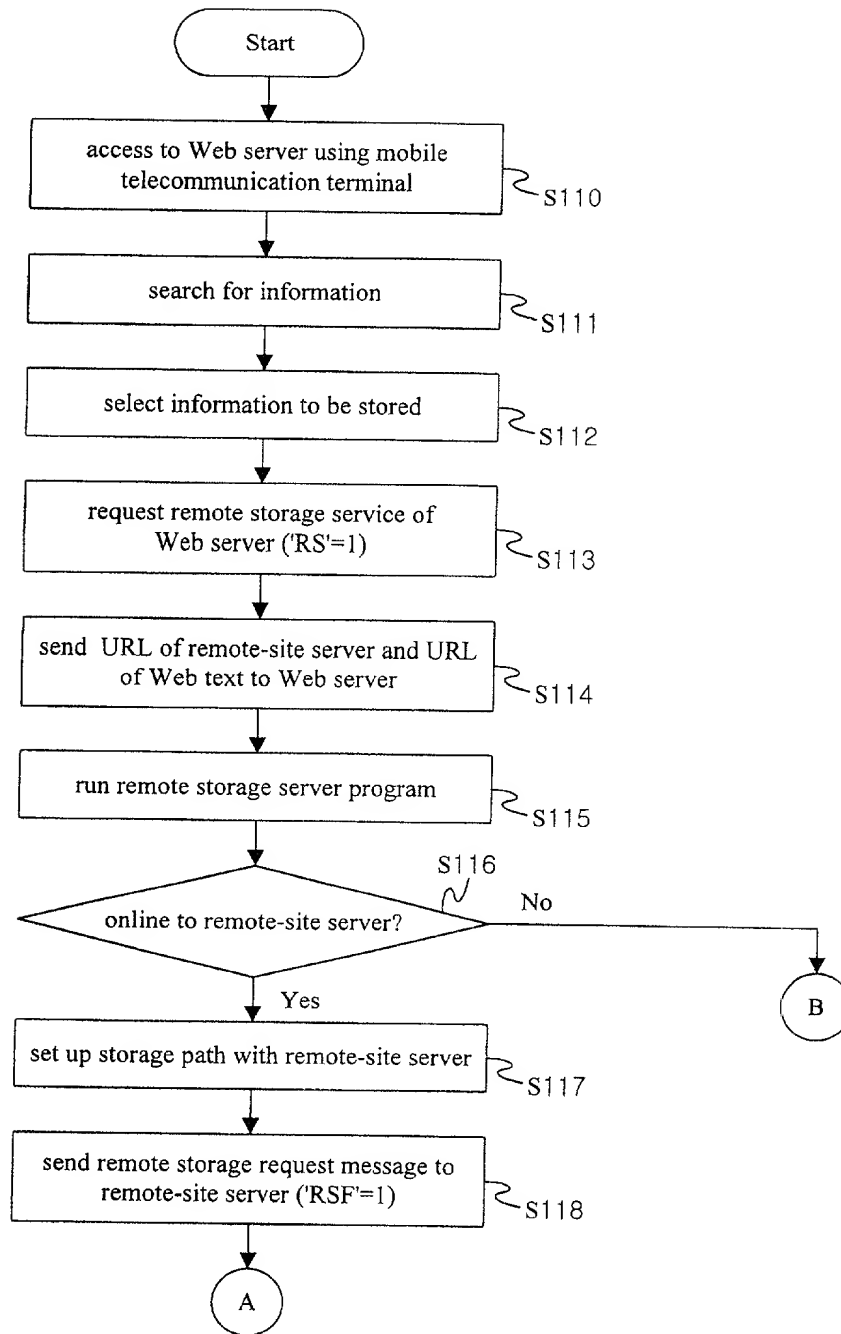


【Fig. 4b】

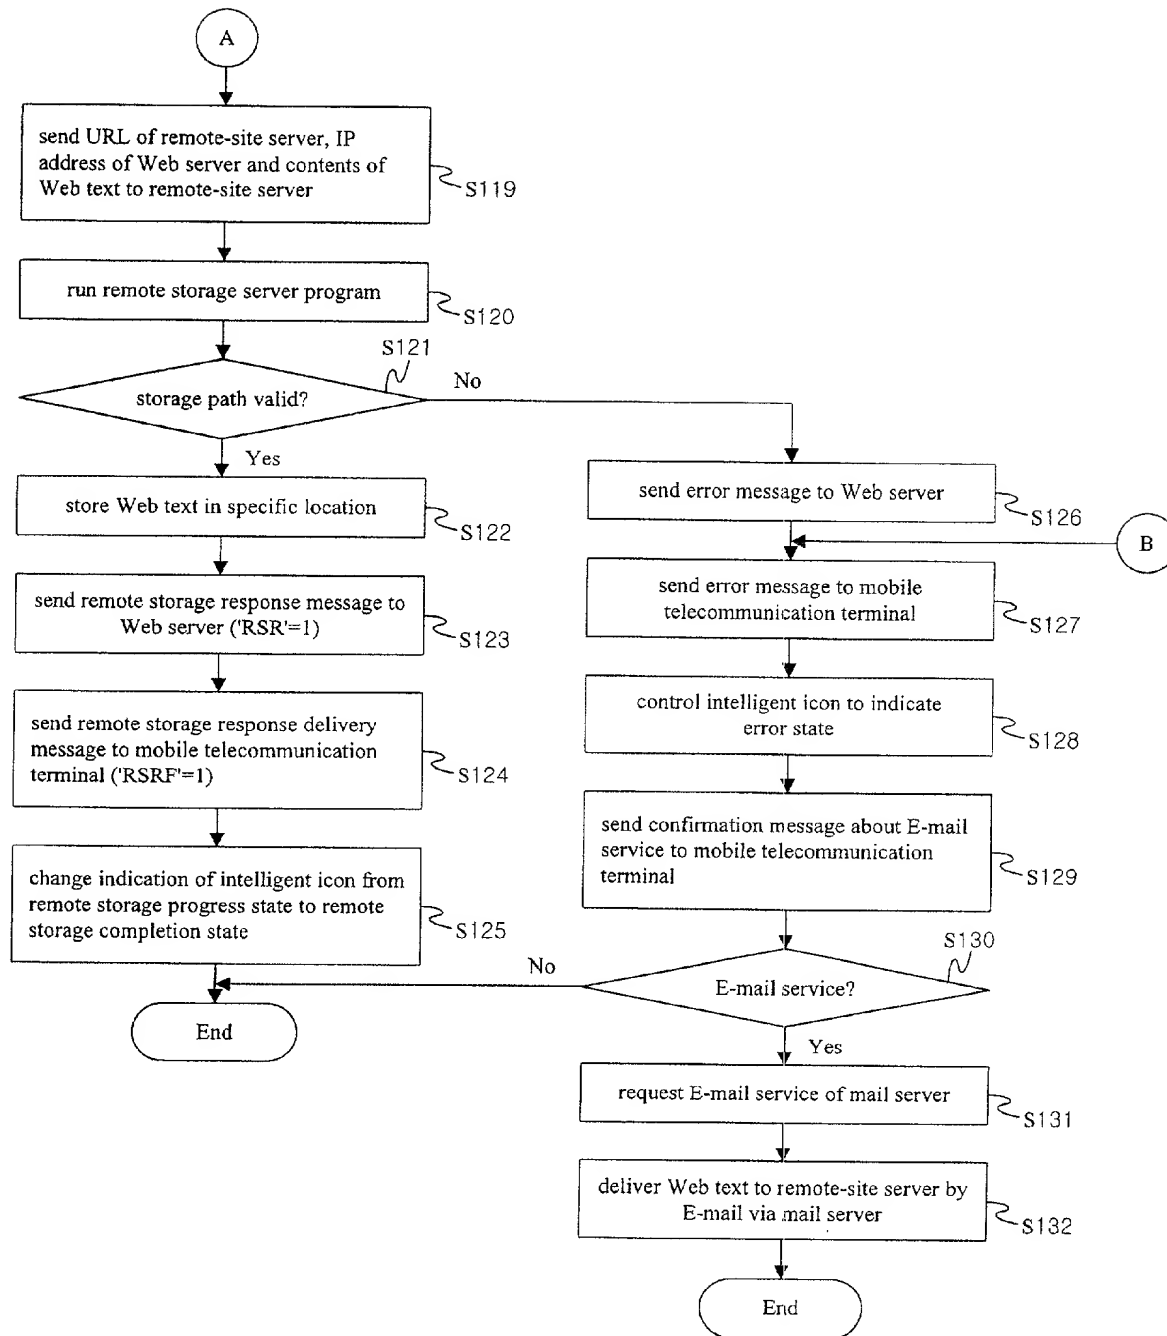


【Fig. 5】

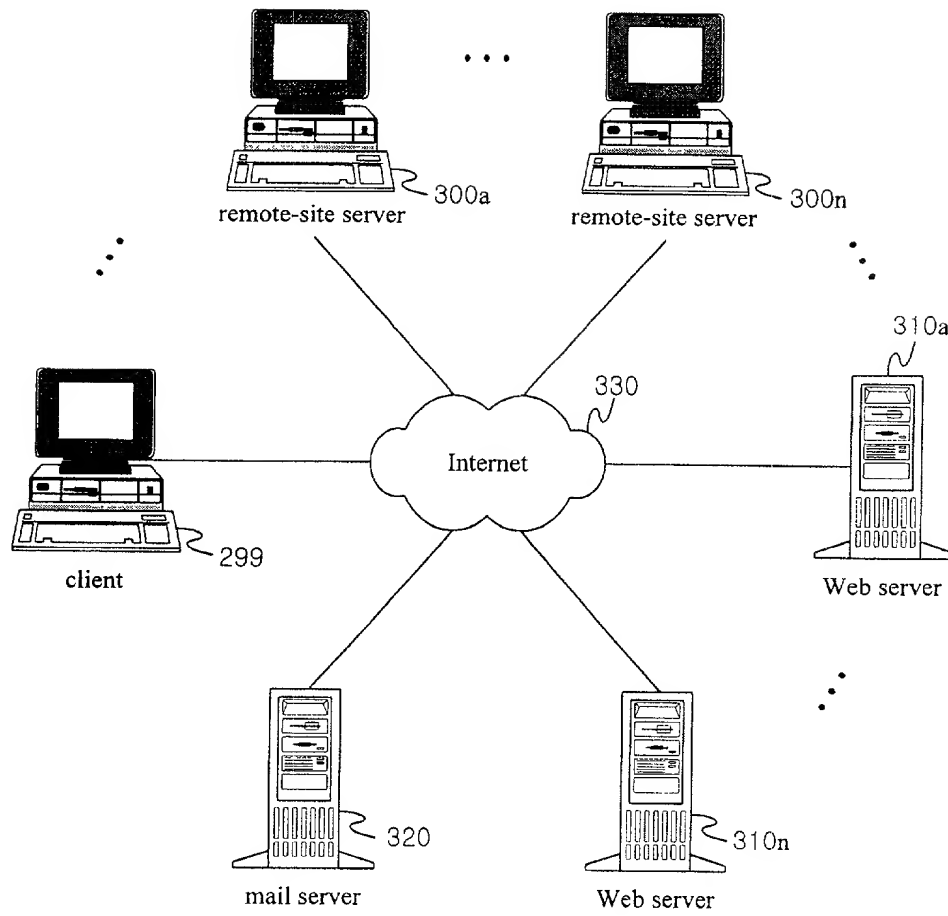


【Fig. 6a】

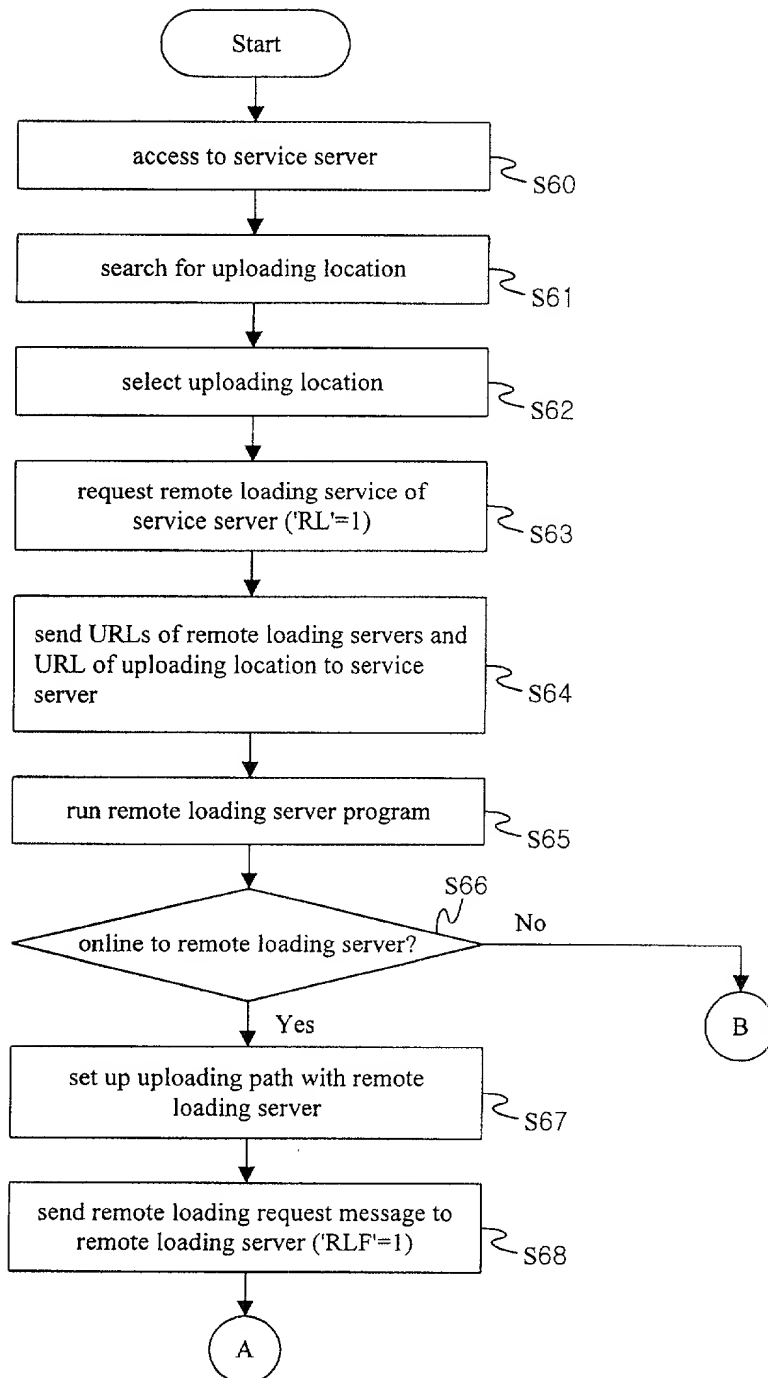


【Fig. 6b】

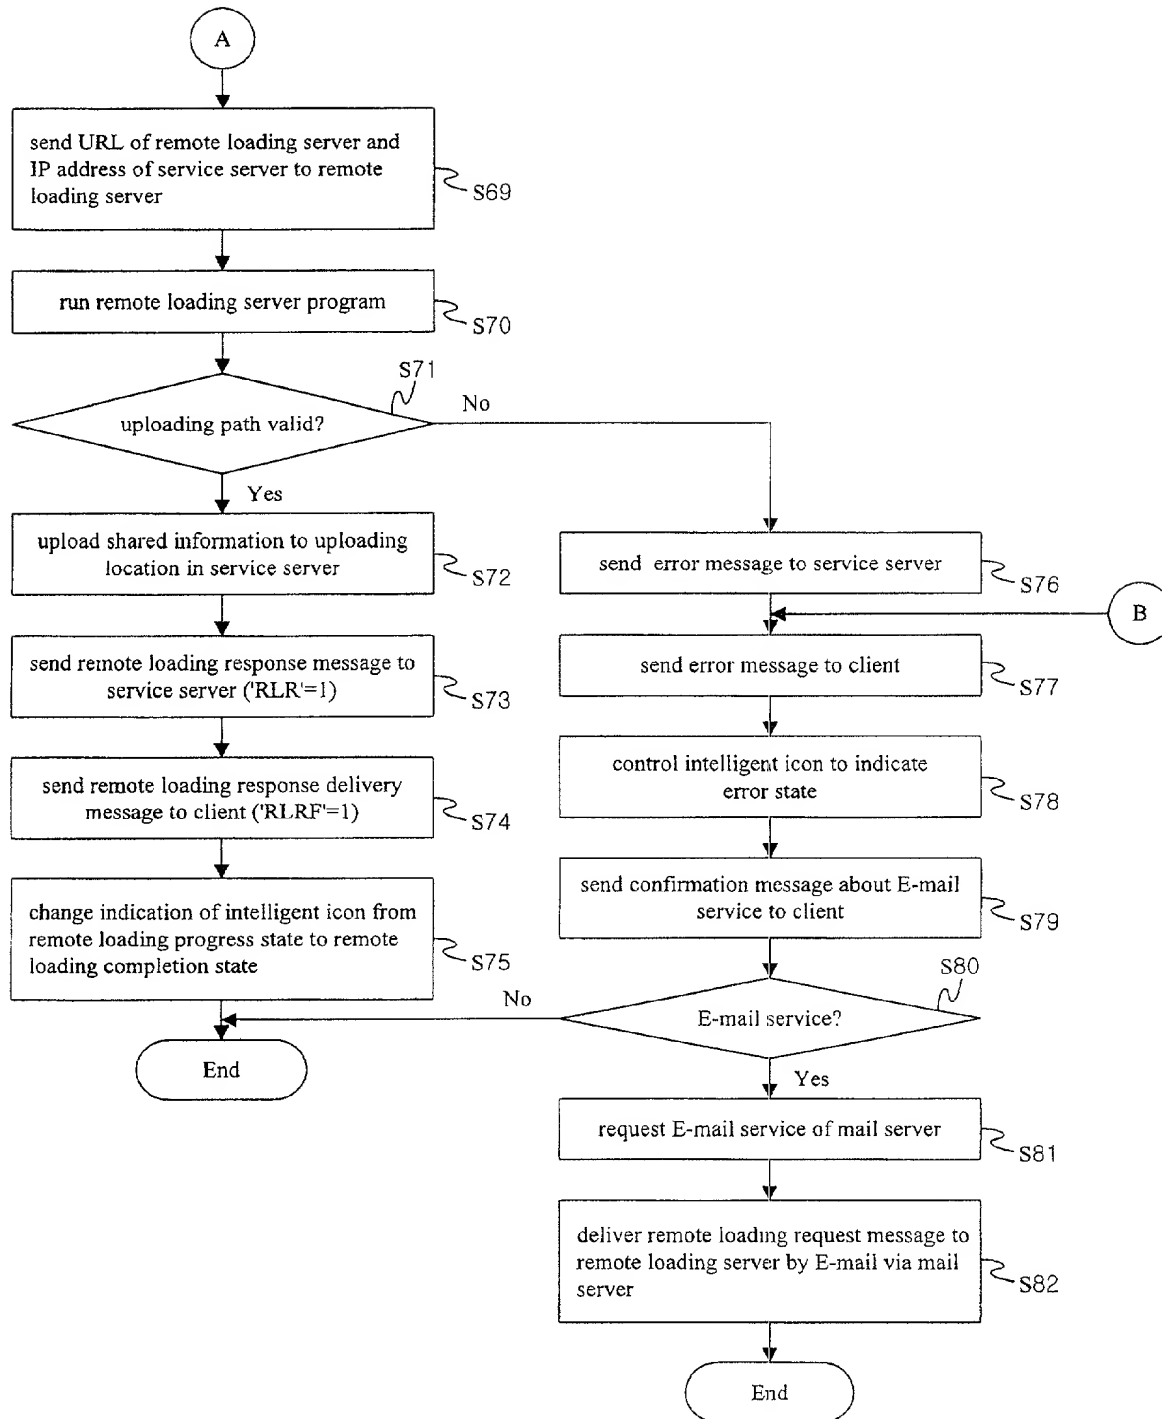


【Fig. 7】

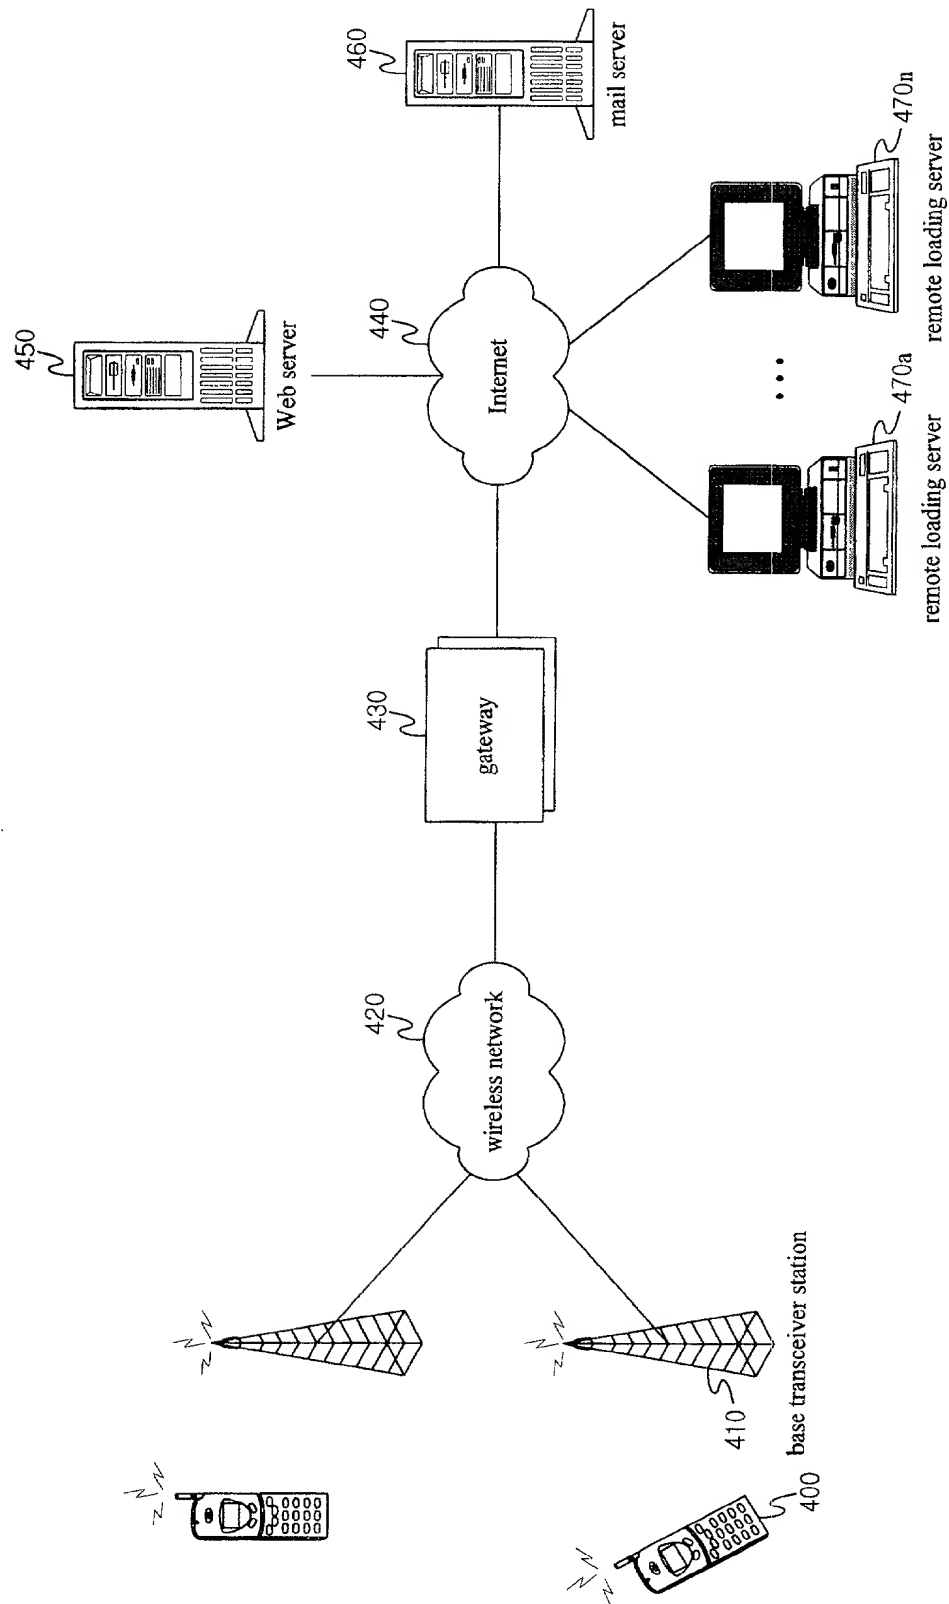


【Fig. 8a】

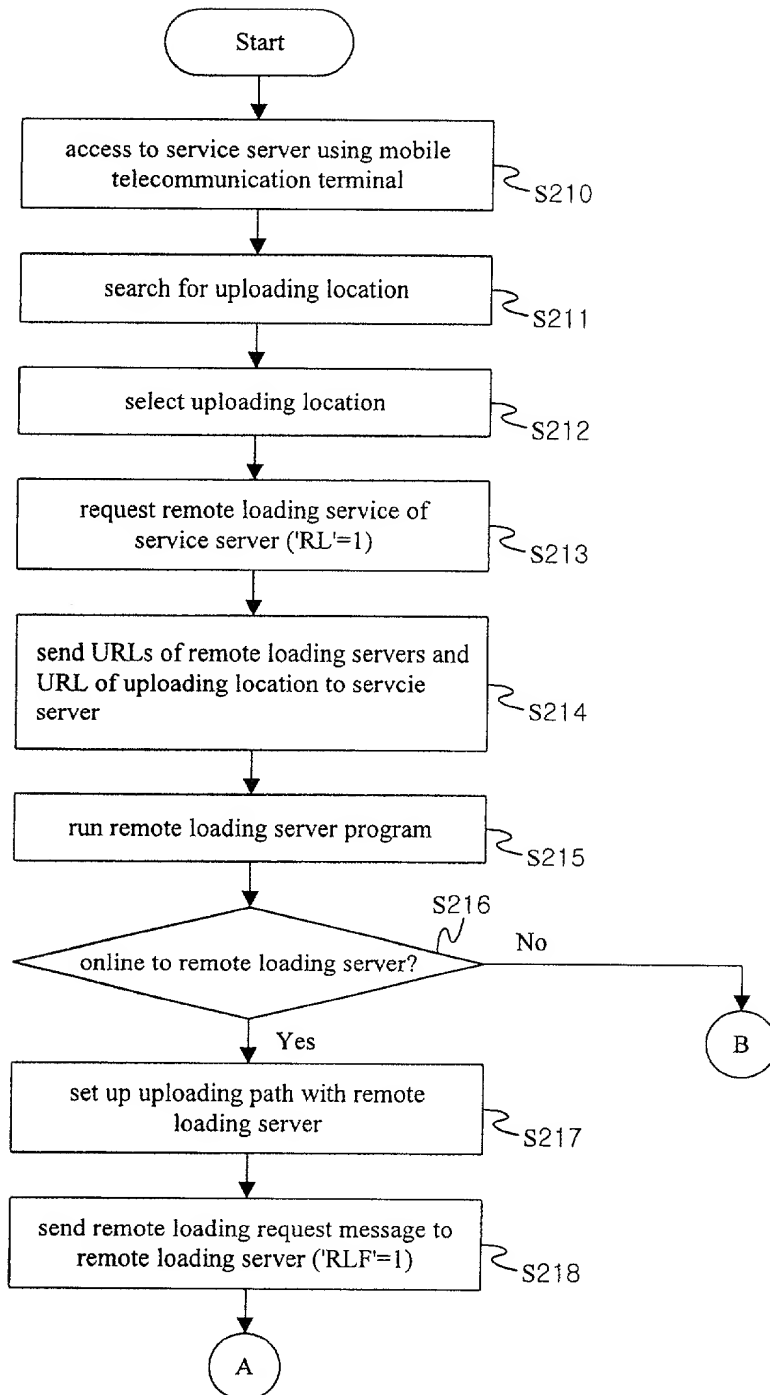


【Fig. 8b】

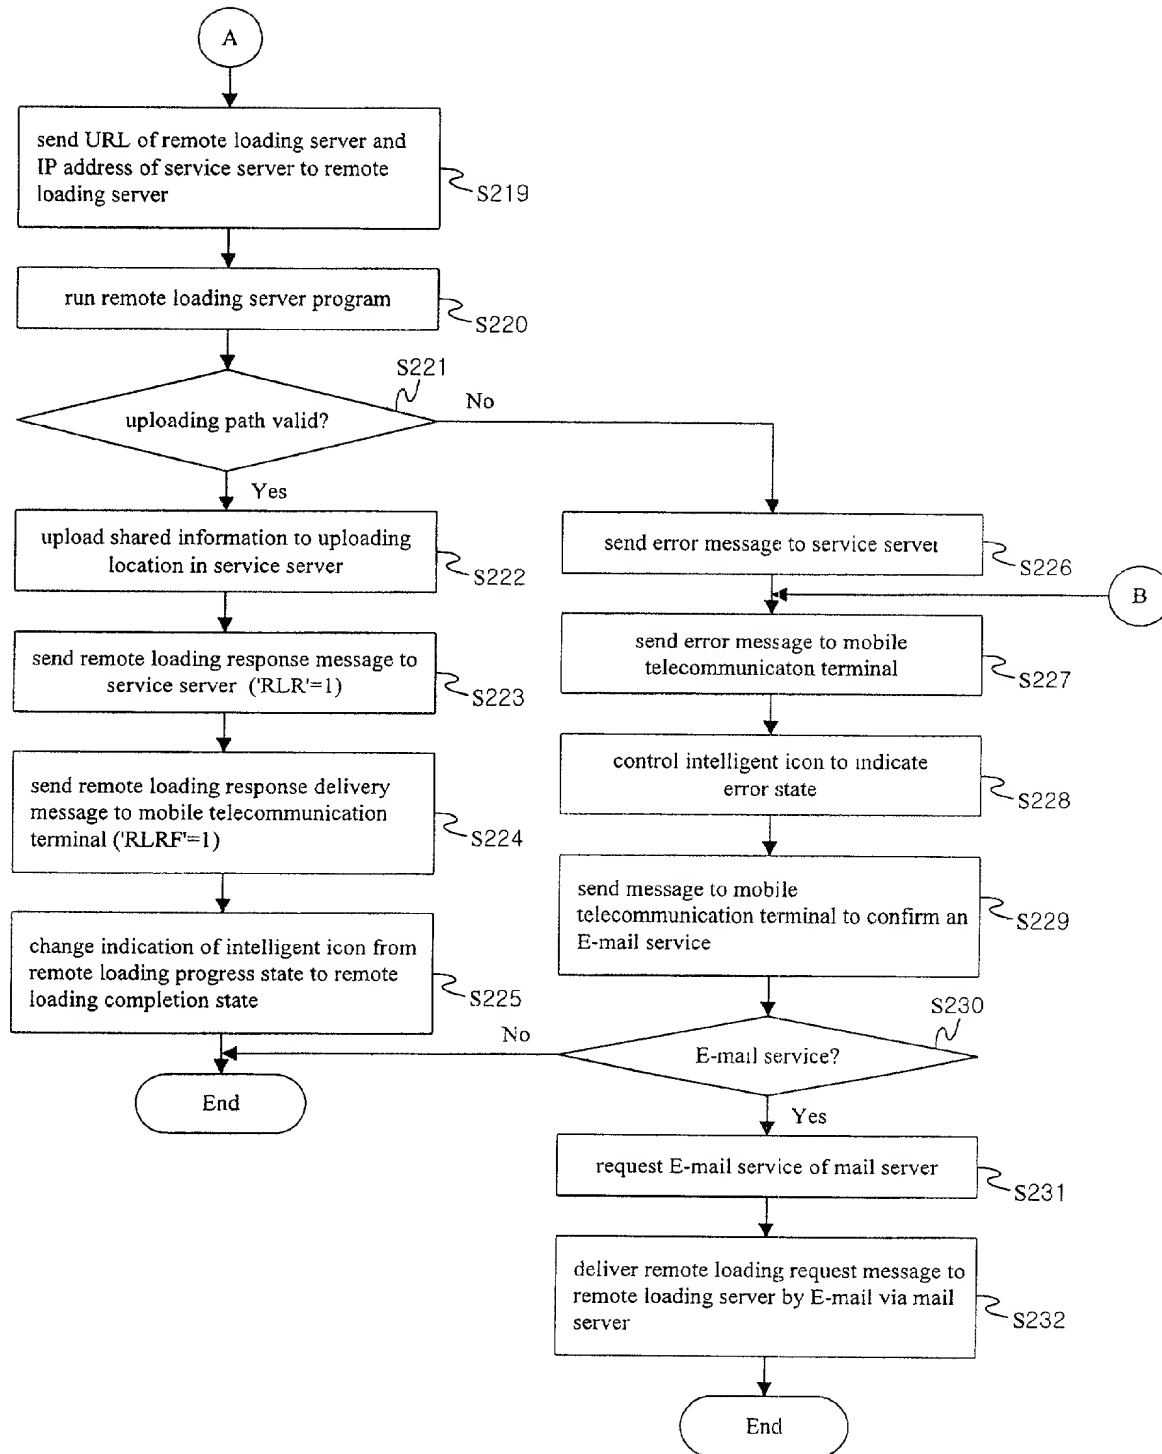


【Fig. 9】

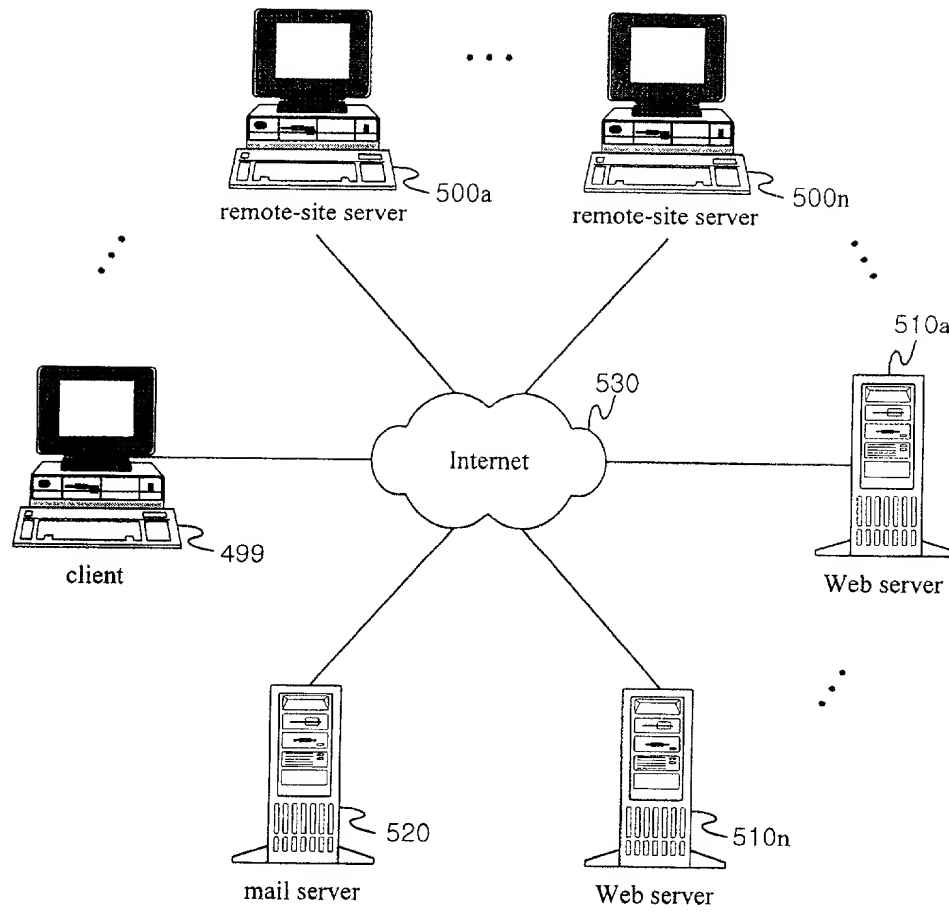


【Fig. 10a】

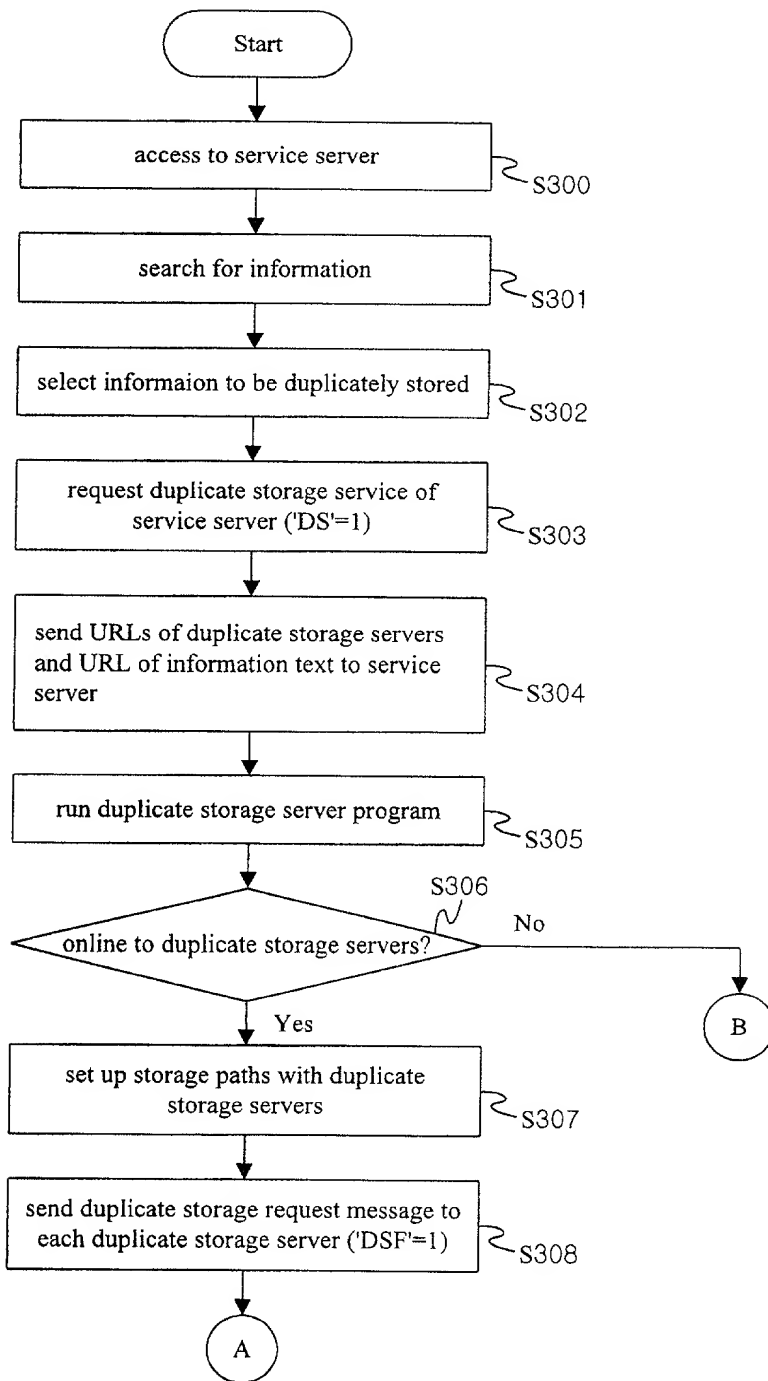


【Fig. 10b】

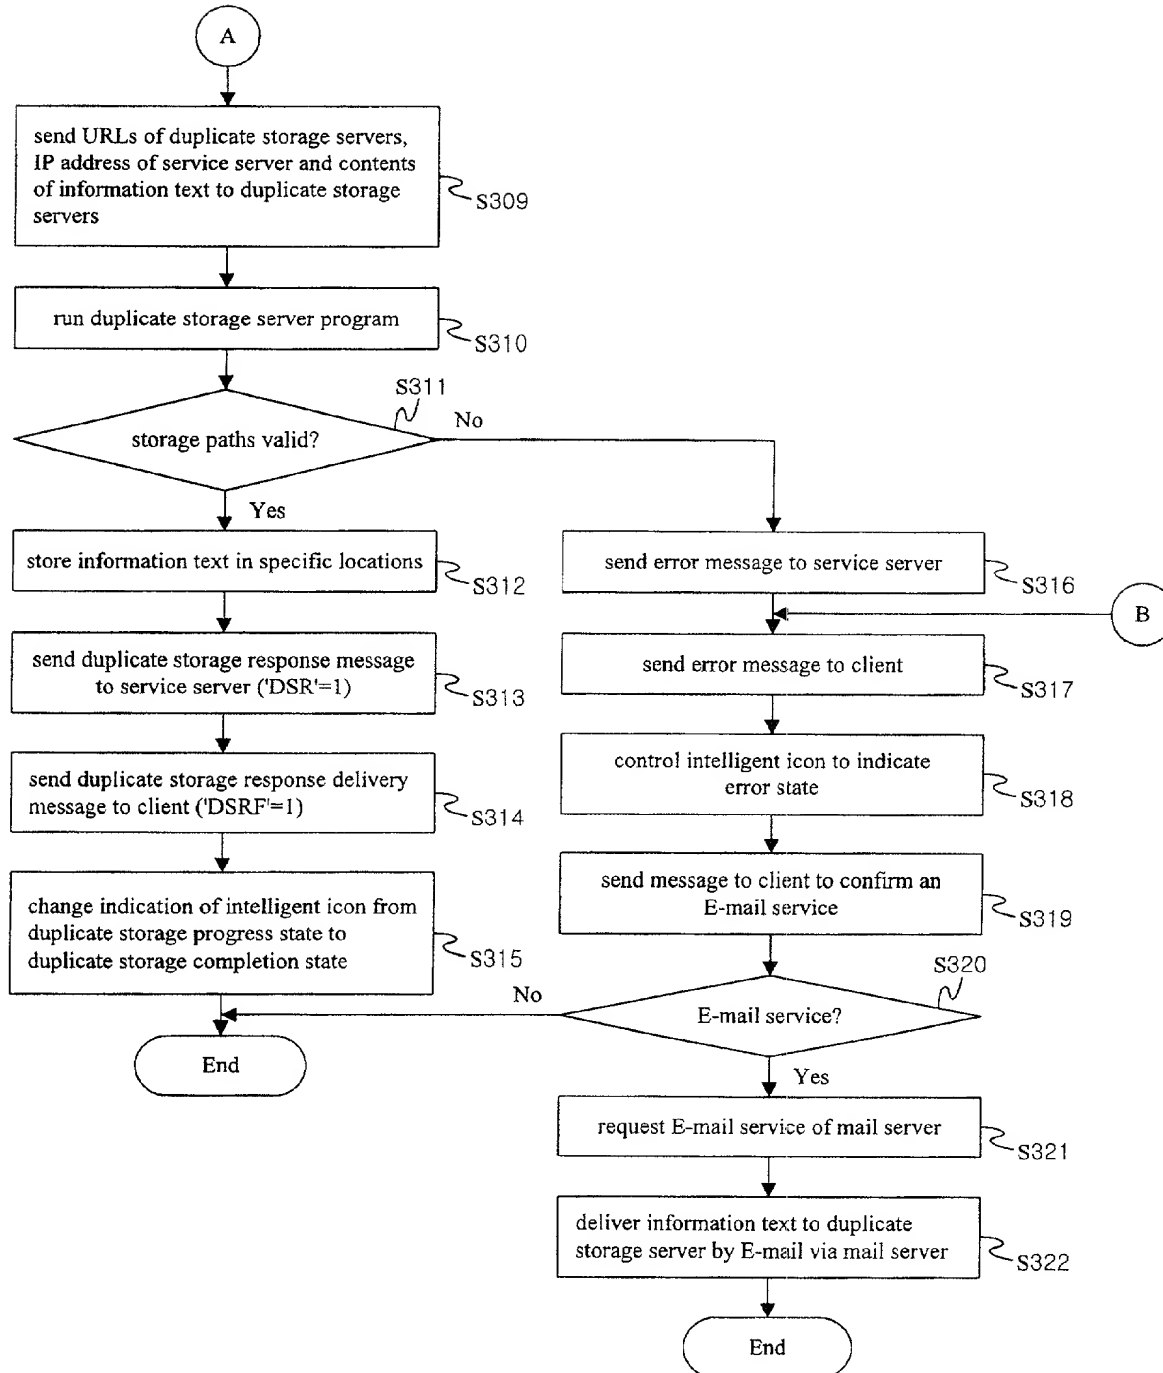


【Fig. 11】

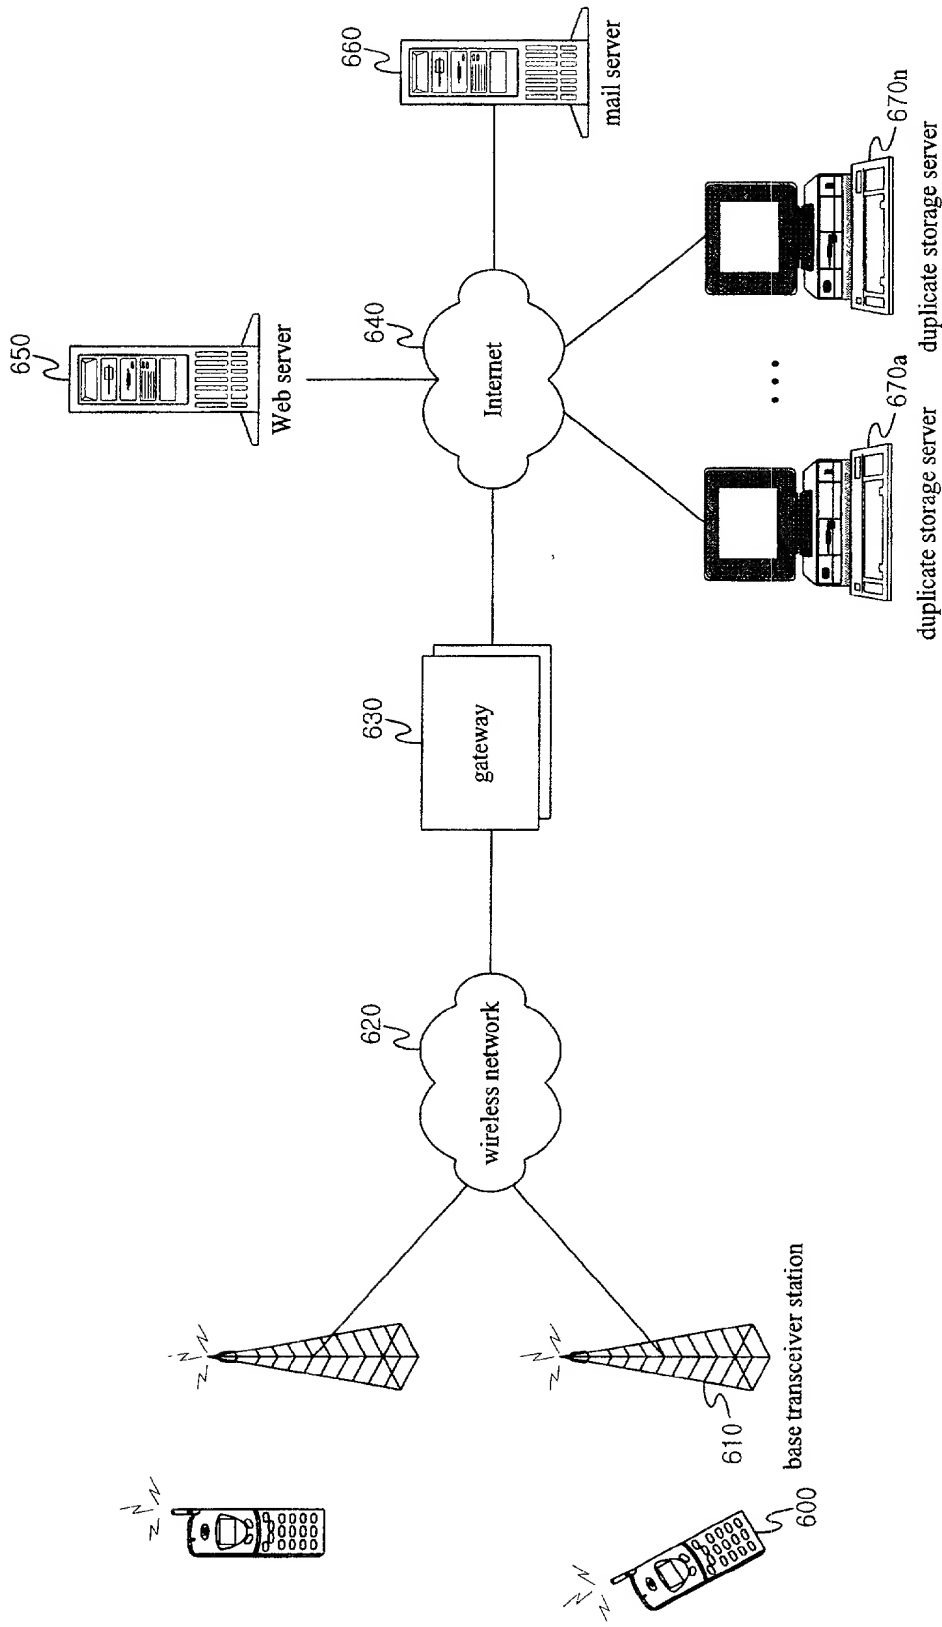

【Fig. 12a】

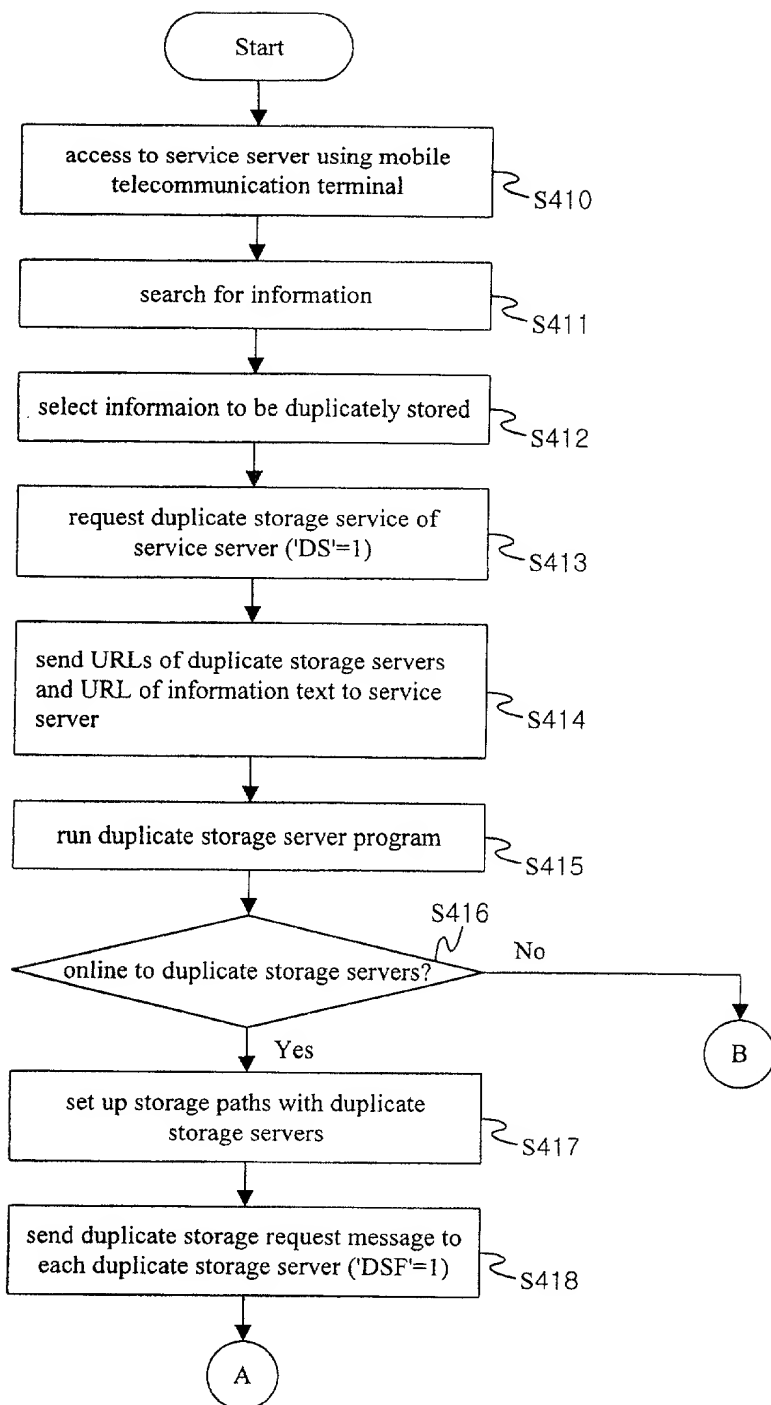

【Fig. 12b】

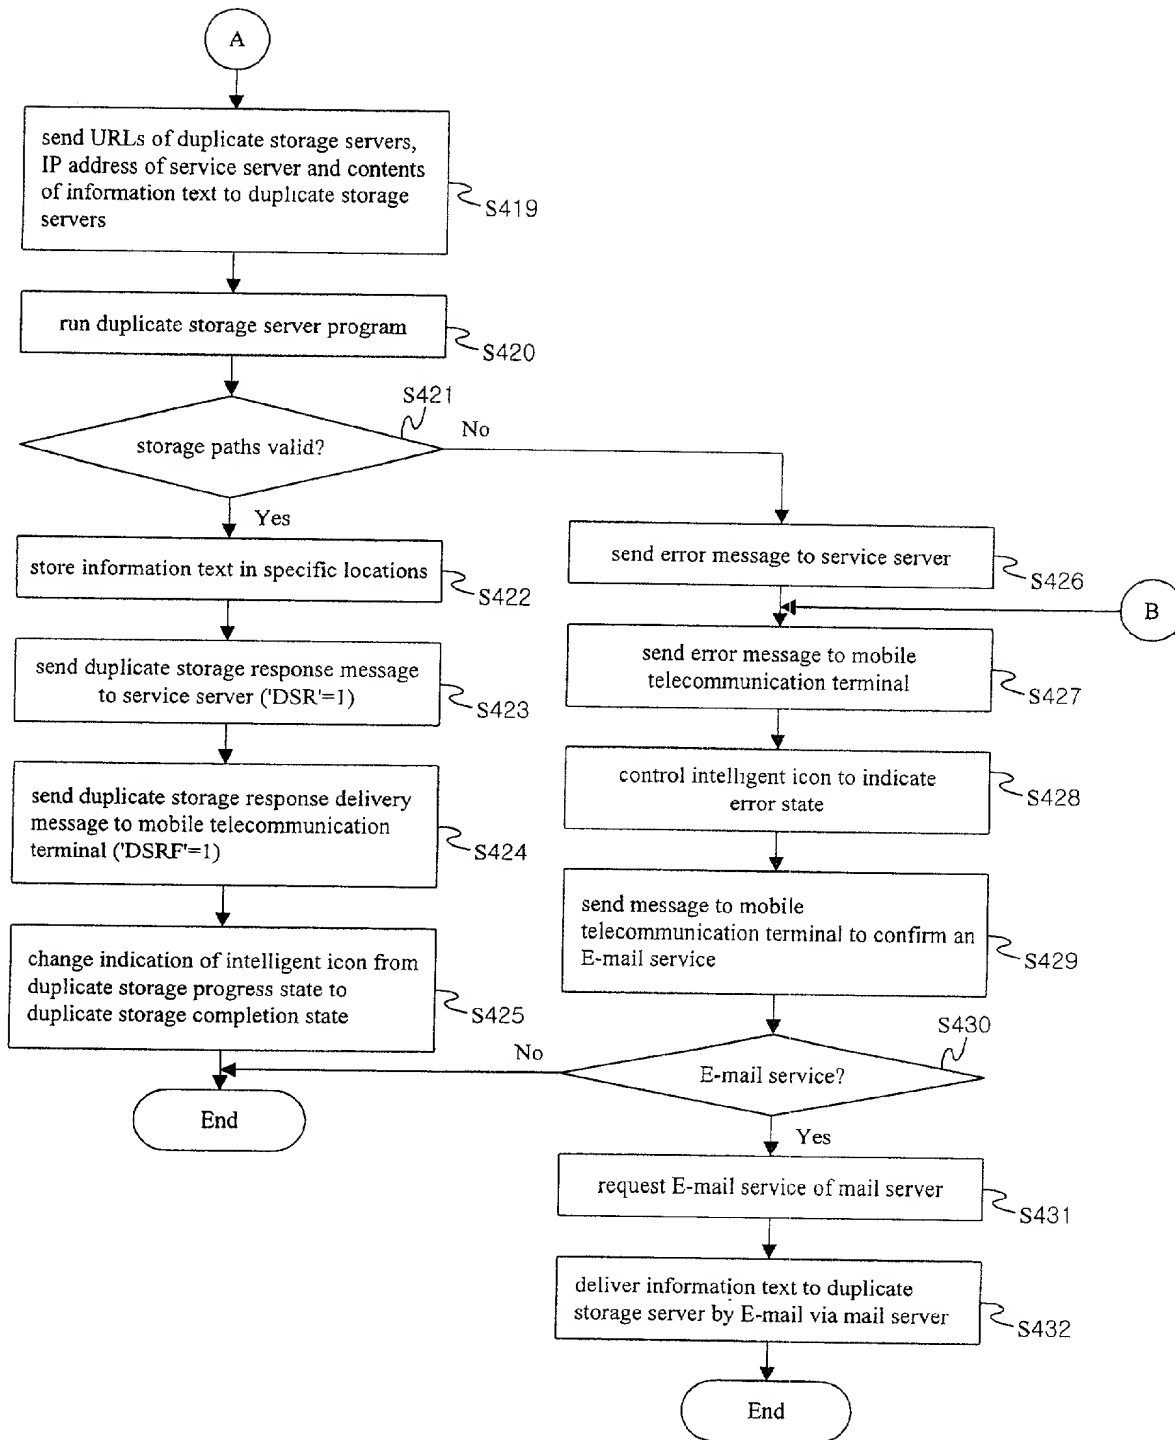



Express Mail No. EL715973086US
Docket No.: C41889/123076

**DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION - SOLE**

As the below named inventor, I hereby declare that:

My residence, post office addresse, and citizenship are as stated below next to my name.

I believe that I am the sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **REMOTE SAVING METHOD OF THE SEARCH INFORMATION ON THE INTERNET**, the specification of which was filed on **March 9, 2001** and accorded Serial No. 09/786,790, to be assigned.

I hereby state that we reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to the examination of this application in accordance with 37 Code of Federal Regulations §1.56.


I hereby claim foreign priority benefits under 35 United States Code §§119 and 365 of any foreign application(s) for the patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**Prior Foreign Application: Korean Patent Application Serial No.
99-31718 Filed on August 2, 1999;**

**Prior Foreign Application: Korean Patent Application Serial No.
99-44080 Filed on October 12, 1999**

**Prior Foreign Application: Korean Patent Application Serial No.
99-64756 Filed on December 29, 1999**

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112. I acknowledge the duty to disclose information



which is material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

PCT/KR00/00364 filed on April 19, 2000

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

15 Stiefel, Maurice B., Reg. 18,479; Kurland, Lawrence G., Reg. No. 24,895; Gilbert, Stephen P., Reg. No. 27,893; Waddell, Mark E., Reg. No. 31,803; Roodman, David A., Reg. No. 35,663; Wilson, N. Whitney, Reg. No. 38,661; Crowe, Daniel A., Reg. No. 39,644; Haracz, Stephen M., Reg. No. 33,397; MacRae, Warren K., Reg. No. 37,876; Hooper, Kevin C., Reg. No. 40,402; Gersh, Kathleen, Reg. No. 41,806; Hayes, Christopher J., Reg. No. 41,822; Lenna, Leo G., Reg. No. 42,796; Weigell, Charles, Reg. No. 43,398; Kim, Bosco, Reg. No. 41,896.

Address all telephone calls to Bosco Kim at telephone number (212)- 692-1896.

Address all correspondence to:

Bosco B. Kim, Esq.

BRYAN CAVE LLP

245 Park Avenue

New York, New York 10167-0034

I hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-10
Name of Sole Inventor: Tae Gyu LEE

Inventor's signature: [Signature]

Date: March 20, 2001

Residence: Seoul 156-823, Republic of Korea

Citizenship: Republic of Korea

Post Office Address: Sangsin Apt., 10-101, Sadang 4-dong 1000-2, Dongjak-gu
Seoul 156-823, Republic of Korea *KRA*